




Catalog 2019

1984 Bekamak was founded as a family Company

22.500 m² production area

150 employees 20% of them are Engineers and Technicians

86 kinds of sawing machines

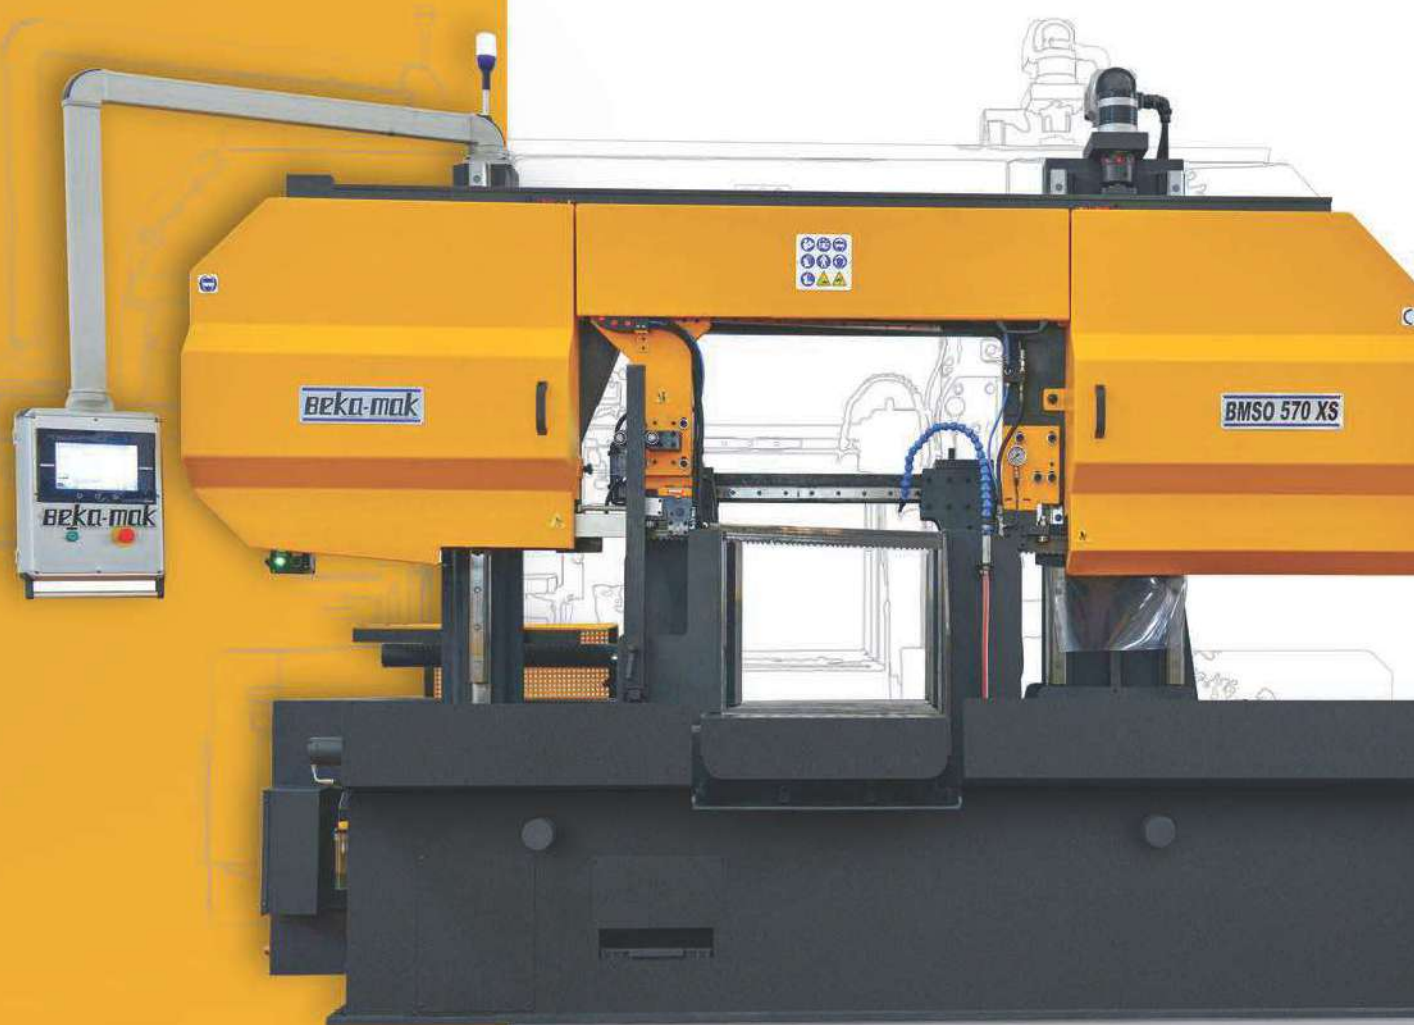

Everything starts by cutting







Founded as a family company in 1984, BEKA-MAK is the pioneering company, opening up the sawing machines sector in Turkey to global market. Beginning its first export to Germany in 1991, BEKA-MAK is now represented in nearly 80 countries by 60 distributors around the world, mainly in Europe, Russia and the United States. Our circular saw and bandsawing machines, which operate with high efficiency in a wide range of products, are also the preference of Turkey's leading steel producers.

BEKA-MAK, operating in 10.500m² establishment with its 150 qualified employees, continues to contribute to the steel industry with its philosophy of continues development and innovation. We are proud to announce that our official Research and Development Department



Circular Saw Machines	BMDO ISAW - 100 IA	08	
	BMDO ISAW - 120 IA	08	
	BMDO ISAW - 150 IA	08	
	BMDO ISAW - 80 VA	10	
Fully Automatic Double Column Bandsaw Machines with Servo/Hydraulic Feeding System	BMSO 570 XS	14	
	BMSO 650 CS/CH NC	16	
	BMSO 560 CS/CH NC	17	
	BMSO 460 CS/CH NC	18	
	BMSO 360 CS/CH NC	19	
	BMSO 330 CS/CH NC	20	
	P-SAW 330 CS	22	
Fully Automatic One Side Mitre Cutting Machines with Hydraulic/Servo Feeding System	BMSO 540 CGH/CGS NC	26	
	BMSO 440 CGH/CGS NC	28	
	BMSO 360 CGH/CGS NC	29	
	BMSO 325 CGH/CGS NC	29	
	BMSO 320 GHL NC/GSL NC	30	
	BMSO 320 GH NC/GS NC	31	
	BMSO 320 H NC/S NC	32	
	BMSO 320 LH NC/LS NC	33	
Double Column Semi Automatic Double Mitre Bandsaw Machines	BMSY 650 DG NC	36	
	BMSY 750 DG NC	37	
	BMSY 560 DG	38	
	BMSY 560 DG NC	38	
	BMSY 440 CDGH	39	
	BMSY 440 CDGH NC	39	
	BMSY 360 CDGH	40	
Heavy Duty Semi Automatic Double Column Bandsaw Machines	BMSY 1515C	44	
	BMSY 1122C	46	
	BMSY 1313C	48	
	BMSY 1113C	50	
	BMSY 1110C	51	
Semi Automatic Double Column Bandsaw Machines	BMSY 1020C	54	
	BMSY 820C	56	
	BMSY 810C	58	
	BMSY 650C	60	
	BMSY 570C	61	
	BMSY 560C	61	
	BMSY 460C	62	
	BMSY 360C	64	
Fully Automatic Double Column Bandsaw Machines	BMSO 820C	68	
	BMSO 810C	70	
	BMSO 560C	72	
	BMSO 460C	73	
	BMSO 360C	74	
	BMSO 325C	75	



Semi Automatic Mitre Cutting Bandsaw Machines

BMSY 810 CGH	78
BMSY 540 CGH	80
BMSY 440 CGH	82
BMSY 360 CGH	83
BMSY 325 CGH	84
BMSY 320 GL	85
BMSY 320 G	86
BMS 320 G	87



Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machines

BMSY 440 DGH / DGH NC	90
BMSY 360 DGH	92
BMSY 360 DGH ECO	93
BMSY 270 DGH	94
BMSY 270 DG	94
BMS 270 DG	95
BMSY 230 DGH	96
BMSY 230 DG	96
BMS 230 DG	97



Fully Automatic Pivot Type Bandsaw Machines

BMSO 440	100
BMSO 320 L	101
BMSO 320	102
BMSO 230	103



Semi Automatic Pivot Type Bandsaw Machines

BMSY 440	106
BMSY 350 M	108
BMSY 320 L	109
BMSY 320	110
BMSY 280	111



Manual Pivot Type Bandsaw Machines

BMS 320	114
BMS 280	115



Hydraulic Hacksawing Machine

BMH 170	117
---------	-----





DOUBLE COLUMN SEMI AUTOMATIC DOUBLE MITRE BANDSAW MACHINES

**BMSY 650 DG NC - BMSY 750 DG NC - BMSY 560 DG
BMSY 560 DG NC- BMSY 440 CDGH
BMSY 440 CDGH NC - BMSY 360 CDGH**

High cutting performance with precise mitre cuts! Our semi-automatic double-sided bandsaw models allow two-sided, angled cuts without the material being tacked. In standard models, the head is rotated manually by turning the angle from the digital angle indicator. On the machines with NC option, the angle of the head is adjusted from the PLC control panel to save time.



Type	Page
BMSY 650 DG NC	36
BMSY 750 DG NC	37
BMSY 560 DG	38
BMSO 560 DG NC	38
BMSY 440 CDGH	39
BMSO 440 CDGH NC	39
BMSY 360 CDGH	40

BMSY 650 DG NC - BMSY 750 DG NC


Double Column Semi Automatic Double Mitre Bandsaw Machine

Standards

PLC Control Panel
Planetary Gearbox
Blade 54
Turn Table
Security Sensor Rope
Hydraulic Vice
Motorized Chip Brush
Security Switch
Synchronization Moveable Arm/Vice
Sensitive Pressure
Hydraulic Blade Tension
Inverter
Chip Conveyor
Linear Way
Height Adjustment Sensor
Security Switch In Case of Blade Stuck

Optionals

Laser Pointer
3 Mt Roller Table
3 Mt Motorized Roller Table
Microspray Coolant
Hydraulic Top Clamping



OPTIONALS



Technical Datas

	BMSY 650 DG NC				BMSY 750 DG NC			
								
Cutting Capacity	0°	650	1000 x 600	600	0°	800	1300 x 750	800
	30°	650	840 x 600	600	30°	800	1070 x 750	770
	45°	650	660 x 600	600	45°	800	850 x 750	770
	60°	440	440 x 600	440	60°	570	570 x 750	570
	-30°	650	840 x 600	600	-30°	800	1070 x 750	770
	-45°	650	660 x 600	600	-45°	800	570 x 750	770
Main Motor	7,5 kW				7,5 kW			
Hydraulic Motor	4 kW				4 kW			
Coolant Motor	0,12 kW				0,12 kW			
Angle Motor	0,37 kW				0,37 kW			
Chip Conveyor Motor	0,25 kW				0,25 kW			
Motorized Chip Brush	0,18 kW				0,18 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	8400 x 54 x 1,6 mm				9600 x 54 x 1,6 mm			
Working Height	880 mm				880 mm			
Dimensions	Lenght 4750 mm Width 1970 mm		Height 2630 mm Weight 6520 kg		Lenght 5050 mm Width 2200 mm		Height 2900 mm Weight 6700 kg	

Laser Pointer



3 Mt Roller Table



3 Mt Motorized Roller Table



Microspray Coolant



Hydraulic Top Clamping



BMSY 560 DG / BMSY 560 DG NC

BMSY 440 CDGH / BMSY 440 CDGH NC


Semi Automatic Double Mitre Bandsaw Machine

Standards

PLC Control Panel (NC Model)	3° Inclined Bow
Planetary Gearbox	Turn Table
Hydraumechanical Blade Tension	Linear Way
Optical Quick Approaching	Security Swich
Chip Brush	Security Swich In Case of Blade Stuck
Sensitive Pressure	Sensitive Pressure
Synchronization Moveable Arm/Vice	SAP Coolant Pump
Inverter	Hydraulic Vice
Control Panel	Hydraulic Angle Fixing
Blade 41	

Optionals

Hydraulic Blade Tension
3 Mt Roller Table
3 Mt Motorized Roller Table
Hydraulic Top Clamping
Microspray Coolant
Laser Pointer
Chip Conveyor



OPTIONALS

Hydraulic Blade Tension

3 Mt Roller Table

3 Mt Motorized Roller Table

Hydraulic Top Clamping



Microspray Coolant

Laser Pointer

Chip Conveyor

Technical Datas

	BMSY 560 DG / DG NC				BMSY 440 CDGH / CDGH NC			
								
Cutting Capacity	0°	560	820 x 540	540	0°	440	640 x 440	440
	30°	560	705 x 540	540	30°	440	510 x 440	440
	45°	550	550 x 540	540	45°	440	400 x 440	400
	60°	360	360 x 540	360	60°	250	250 x 440	250
	-30°	500	705 x 540	540	-30°	440	510 x 440	440
	-45°	550	550 x 540	540	-45°	390	390 x 440	390
Main Motor	4 kW				4 kW			
Hydraulic Motor	1,5 kW				1,1 kW			
Coolant Motor	0,12 kW				0,12 kW			
Angle Motor	0,37 kW (NC Model)				-			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	6800 x 41 x 1,3 mm				5200 x 41 x 1,3 mm			
Working Height	880 mm				800 mm			
Dimensions	Lenght 3800 mm		Height 2350 mm		Lenght 3100 mm		Height 1910 mm	
	Width 1750 mm		Weight 3200 kg		Width 1200 mm		Weight 1780 kg	

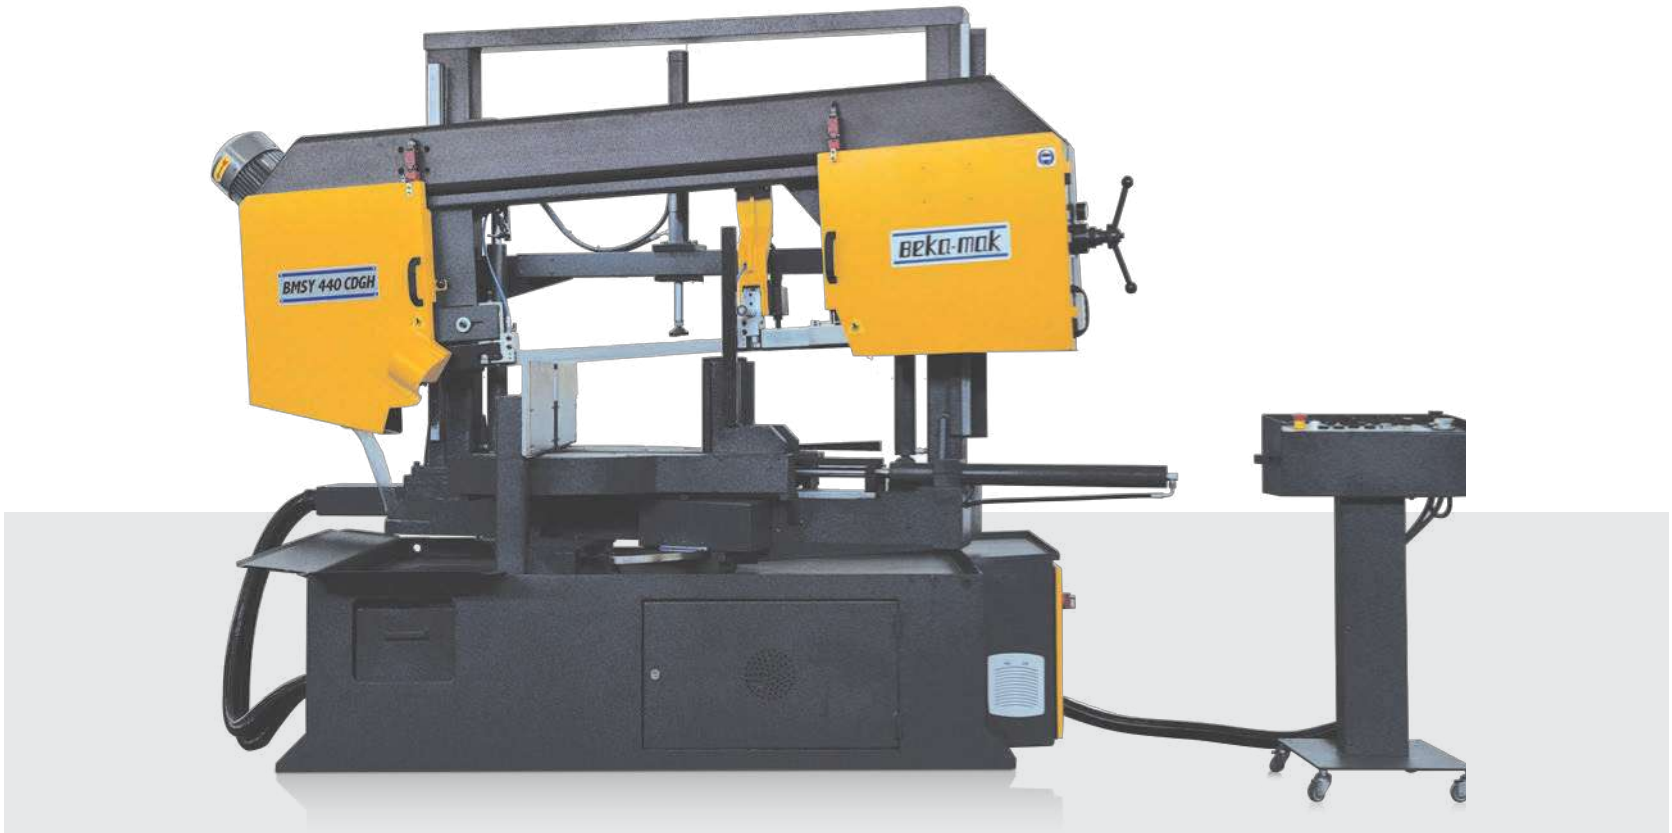

BMSY 360 CDGH

Double Column Semi Automatic Double Mitre Bandsaw Machine

Standards


- Inverter
- Control Panel
- Sensitive Pressure
- Blade 34
- SAP Coolant Pump
- Security Switch
- Optical Quick Approaching
- Synchronization Moveable Arm/Vice
- Hydraumechanical Blade Tension
- Linear Way
- Planetary Gearbox
- 3° Inclined Bow
- Chip Brush
- Hydraulic Angle Fixing
- Hydraulic Vice

Optionals

- Hydraulic Blade Tension
- 3 Mt Motorized Roller Table
- 3 Mt Roller Table
- Hydraulic Top Clamping
- Laser Pointer
- Microspray Coolant



OPTIONALS



Technical Datas

				
Cutting Capacity	0°	360	640 x 360	360
	30°	360	510 x 360	360
	45°	360	390 x 360	360
	60°	310	250 x 360	270
	-30°	360	510 x 360	360
	-45°	360	390 x 360	360

Main Motor	3 kW		
Hydraulic Motor	1,1 kW		
Coolant Motor	0,12 kW		
Cutting Speeds	20 - 100 m/min		
Blade Size	5000 x 34 x 1,1 mm		
Working Height	800 mm		
Dimensions	Lenght 3000 mm		Height 1910 mm
	Width 1200 mm		Weight 1635 kg



Hydraulic Blade Tension



3 Mt Motorized Roller Table



3 Mt Roller Table



Hydraulic Top Clamping



Laser Pointer



Microspray Coolant






HEAVY DUTY SEMI AUTOMATIC DOUBLE COLUMN BANDSAW MACHINES

BMSY 1515C - BMSY 1122C
BMSY 1313C - BMSY 1113C
BMSY 1110C

These models with world-class cutting times in heavy material cuts with robust body, solid bow, high efficiency motor and planetary gearbox are also smart choice for investment. They are suitable for cutting of profiles, tubes and solid material of all qualities and of materials which are difficult to cut (e.g. titanium, Hastelloy, Inconel).

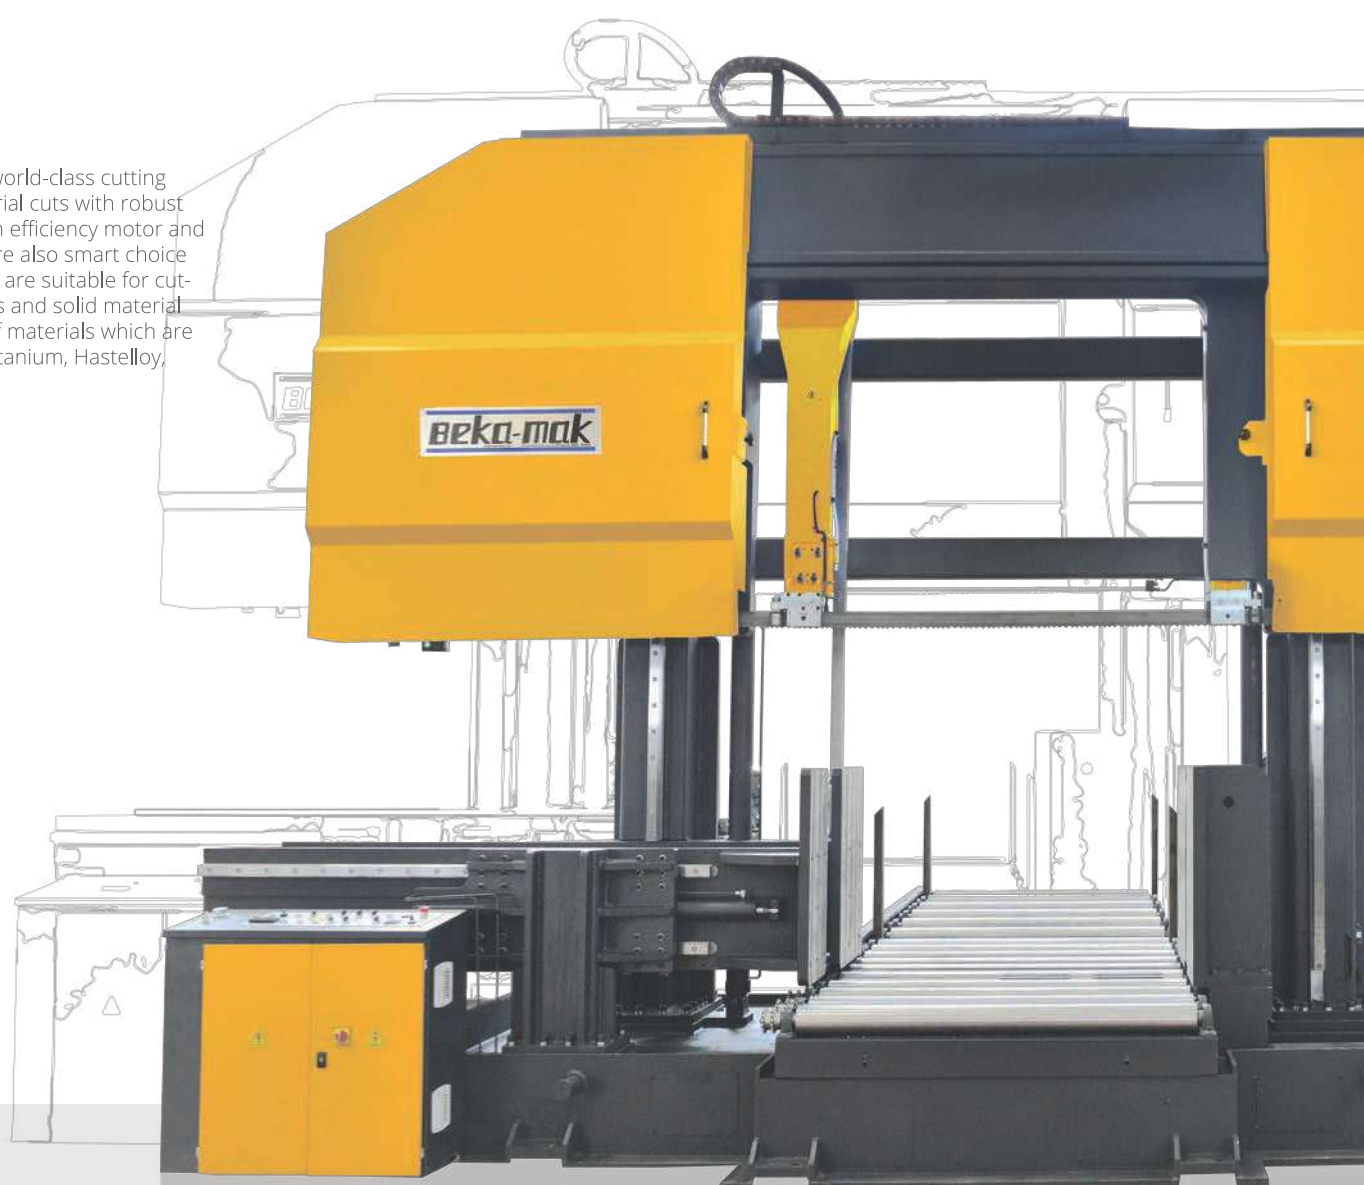

Type	Page
BMSY 1515C	44
BMSY 1122C	46
BMSY 1313C	48
BMSY 1113C	50
BMSY 1110C	51

BMSY 1515C

Heavy Duty Semi Automatic Double Column Bandsaw Machine


Standards

Hydraulic Double Vice
Planetary Gearbox,
Piano Type Control Panel
Hydraulic Moveable Arm Guide
Idle Wheel Motion Detector For
Blade Stalling
Sensor for Blade Rupture
Led Lamp
Motorized Chip Brush
Palet Type Chip Conveyor

Optionals


3 Mt Motorized Roller Table
3 Mt Roller Table
Cutting Speed Display
2° Inclined Bow



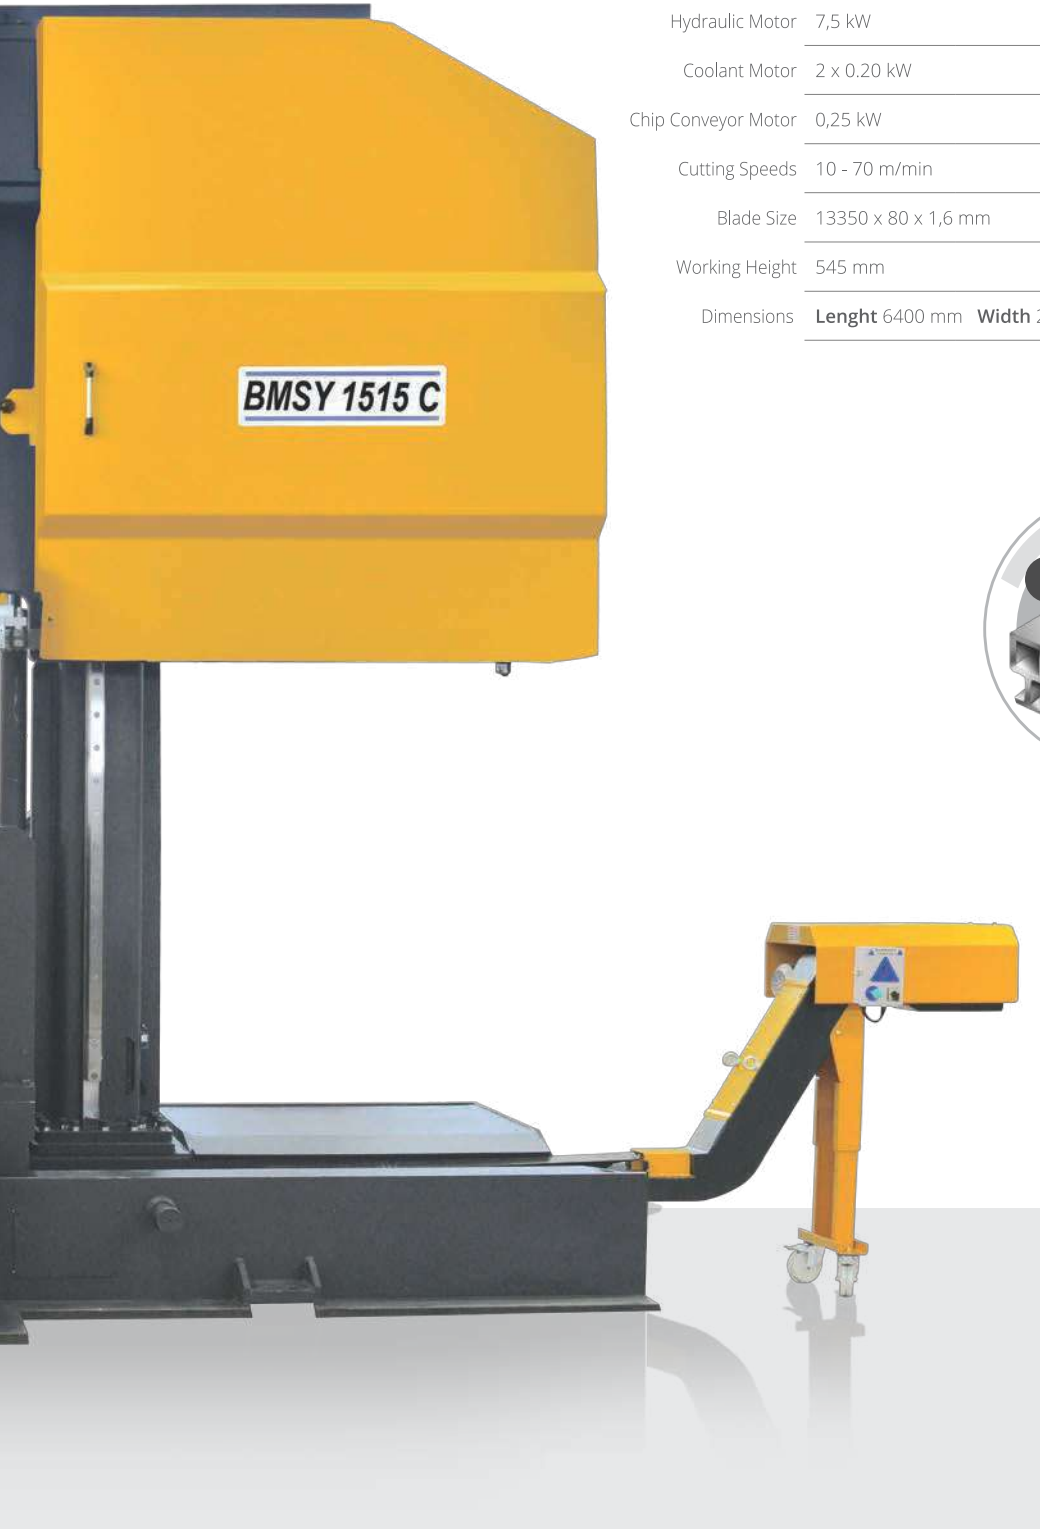

Technical Datas

				
Cutting Capacity	0°	1500	1510x1500	1500
Main Motor	15 kW			
Hydraulic Motor	7,5 kW			
Coolant Motor	2 x 0.20 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	10 - 70 m/min			
Blade Size	13350 x 80 x 1,6 mm			
Working Height	545 mm			
Dimensions	Lenght 6400 mm Width 2400 mm Height 3650 mm Weight 25320 kg			



3 Mt Motorized Roller Table



3 Mt Roller Table





OPTIONALS

BMSY 1122C

Heavy Duty Semi Automatic Double Column Bandsaw Machine


Standards

Hydraulic Double Vice
Planetary Gearbox,
Piano Type Control Panel
Hydraulic Moveable Arm Guide
Idle Wheel Motion Detector For
Blade Stalling
Sensor for Blade Rupture
Led Lamp
Motorized Chip Brush
Palet Type Chip Conveyor



Optionals


4 Mt Infeed Roller Table
2 Mt Outfeed Roller Table
Deflection Sensor
Cutting Speed Display
2° Inclined Bow

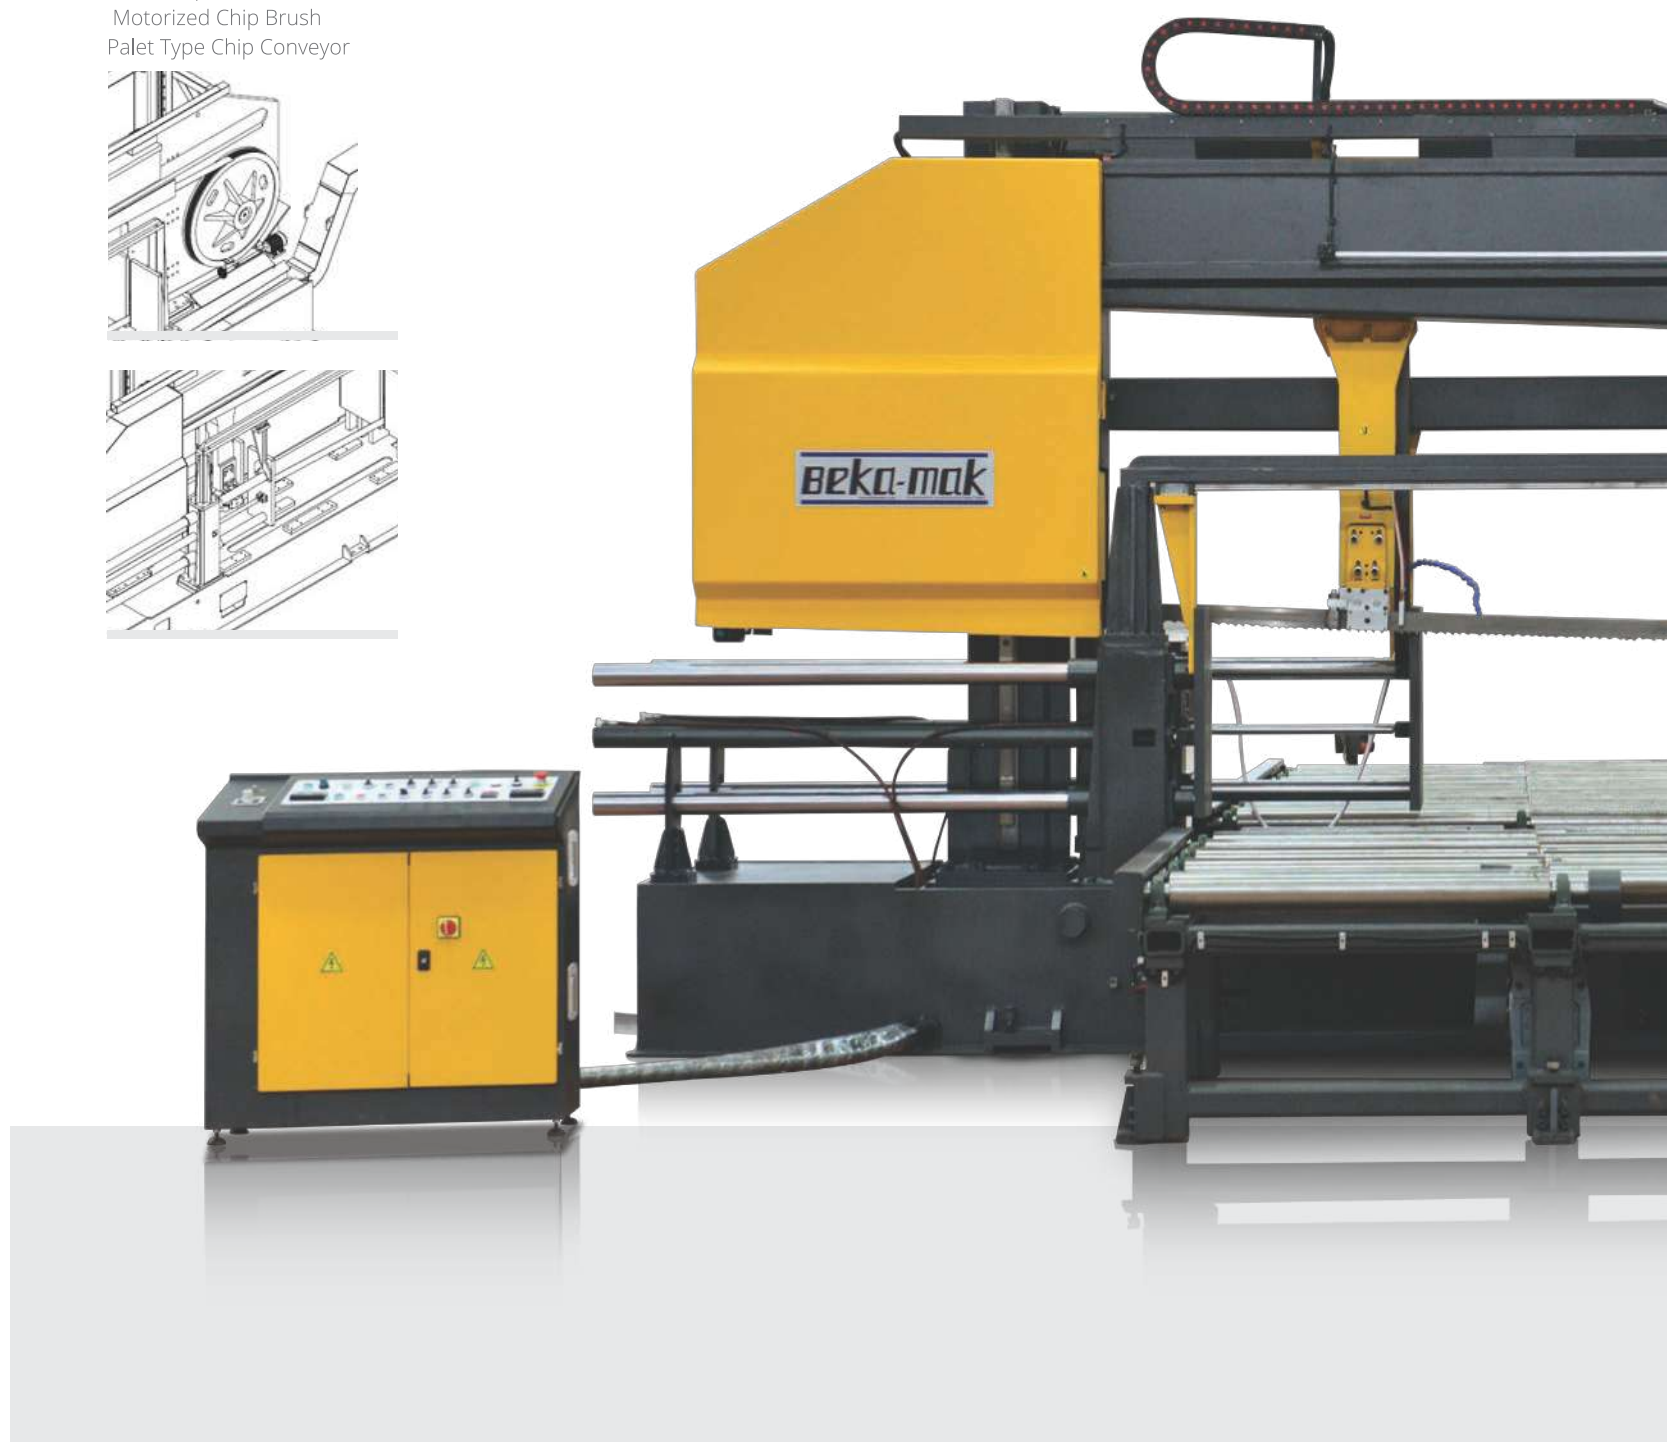



Technical Datas

				
Cutting Capacity	0°	1100	1100 x 2300	1100
Main Motor	15 kW			
Hydraulic Motor	7,5 kW			
Coolant Motor	0,2 kW			
Chip Conveyor Motor	0,25 kW (Ops. 0,55 kW)			
Cutting Speeds	20 - 100 m/min			
Working Height	790			
Blade Size	13100 x 80 x 1,6 mm			
Dimensions	Lenght 7700 mm Width 1250 mm Height 3400 mm Weight 15700 kg			



3 Mt Motorized Roller Table



3 Mt Roller Table



OPTIONALS

BMSY 1313C

Heavy Duty Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Hydraulic Vice
Security Switch
Inverter
Hydraulic Blade Tension
Synchronization Moveable Arm/Vice
Control Panel
Chip Conveyor
Linear Way
Height Adjustment Sensor
Chip Brush
Sensitive Pressure
Blade 67

Optionals

Hydraulic Double Vice
3 Mt Roller Table
3 Mt Motorized Roller Table
Laser Pointer
Hydraulic Top Clamping
Microspray Coolant




OPTIONALS



Technical Datas

				
Cutting Capacity	0°	1300	1300x1300	1300
Main Motor	11 kW			
Hydraulic Motor	7,5 kW			
Coolant Motor	0,2 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	12100 x 67 x 1,6 mm			
Working Height	545 mm			
Dimensions	Lenght 5300 mm Width 1500 mm		Height 3175 mm Weight 11500 kg	



Hydraulic Double Vice



3 Mt Roller Table



3 Mt Motorized Roller Table



Laser Pointer



Hydraulic Top Clamping



Microspray Coolant



BMSY 1113C - BMSY 1110C



Heavy Duty Semi Automatic Double Column Bandsaw Machine

Standards

- Blade 67
- Sensitive Pressure
- Chip Brush
- Height Adjustment Sensor
- Security Switch In Case of Blade Stuck
- Planetary Gearbox
- Linear Way
- Chip Conveyor
- Control Panel
- Synchronization Moveable Arm/Vice
- Hydraulic Blade Tension
- Inverter
- Security Switch

Optionals

- Hydraulic Double Vice
- 3 Mt Motorized Roller Table
- 3 Mt Roller Table
- Microspray Coolant
- Laser Pointer

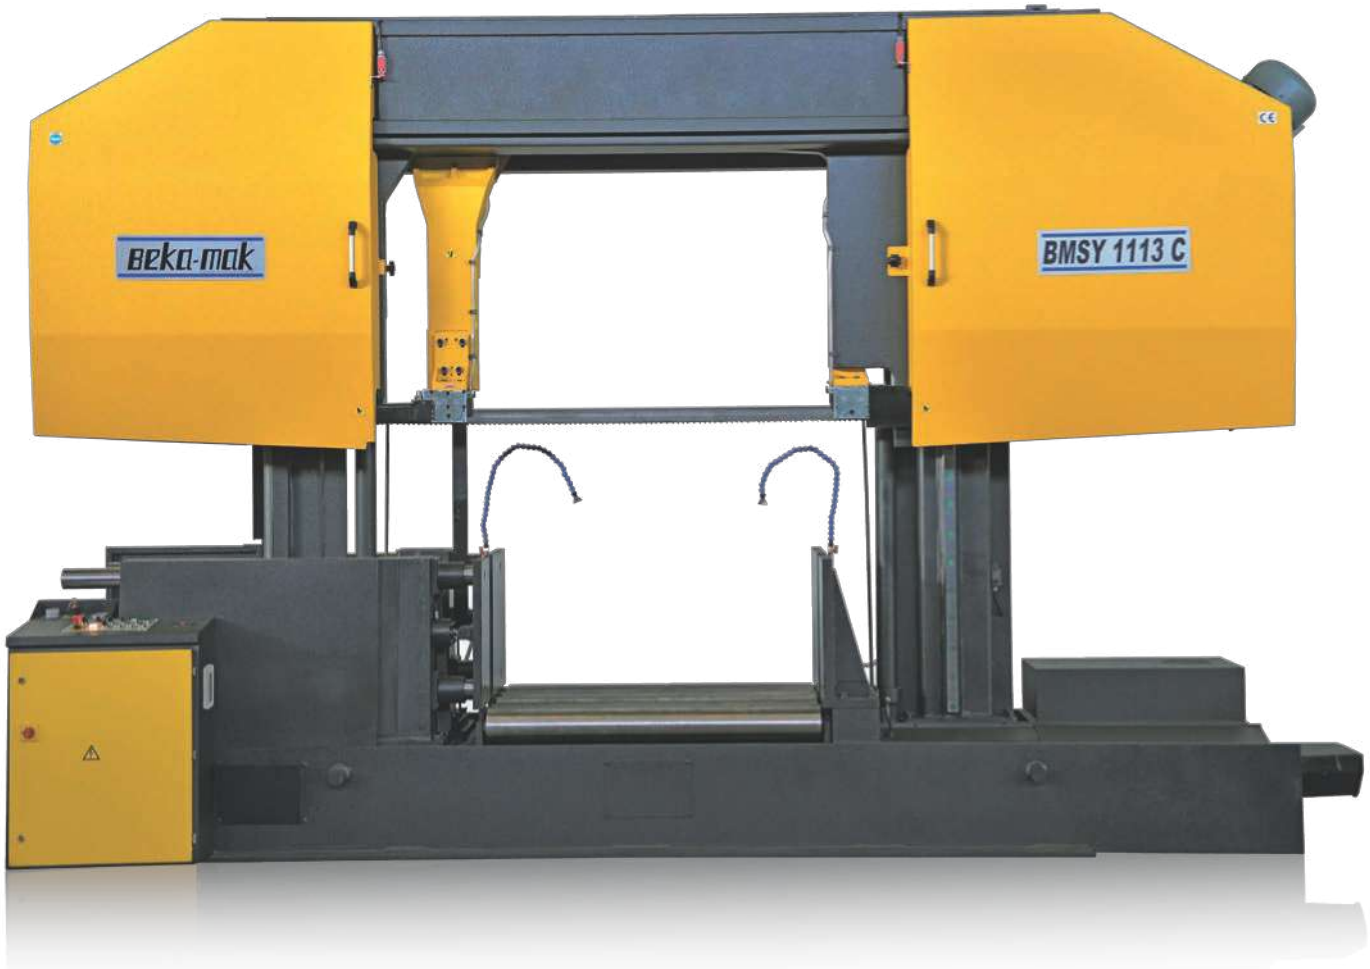

OPTIONALS


Hydraulic Double Vice

3 Mt Motorized Roller Table

3 Mt Roller Table

Microspray Coolant

Laser Pointer



Technical Datas


	BMSY 1113C				BMSY 1110C			
								
Cutting Capacity	0°	1110	1110 x 1300	1110	0°	1110	1110 x 1110	1110
Main Motor	11 kW				11 kW			
Hydraulic Motor	7,5 kW				4 kW			
Coolant Motor	0,20 kW				0,20 kW			
Chip Conveyor Motor	0,25 kW				0,25 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	10900 x 67 x 1,6 mm				10500 x 67 x 1,6 mm			
Working Height	545 mm				545 mm			
Dimensions	Lenght 5300 mm		Height 2975 mm		Lenght 4800 mm		Height 2975 mm	
	Width 1500 mm		Weight 11390 kg		Width 1500 mm		Weight 10440 kg	





SEMI AUTOMATIC DOUBLE COLUMN BANDSAW MACHINES

BMSY 1020C - BMSY 820C - BMSY 810C
BMSY 650C - BMSY 570C - BMSY 560C
BMSY 460C - BMSY 360C - BMSY 325C

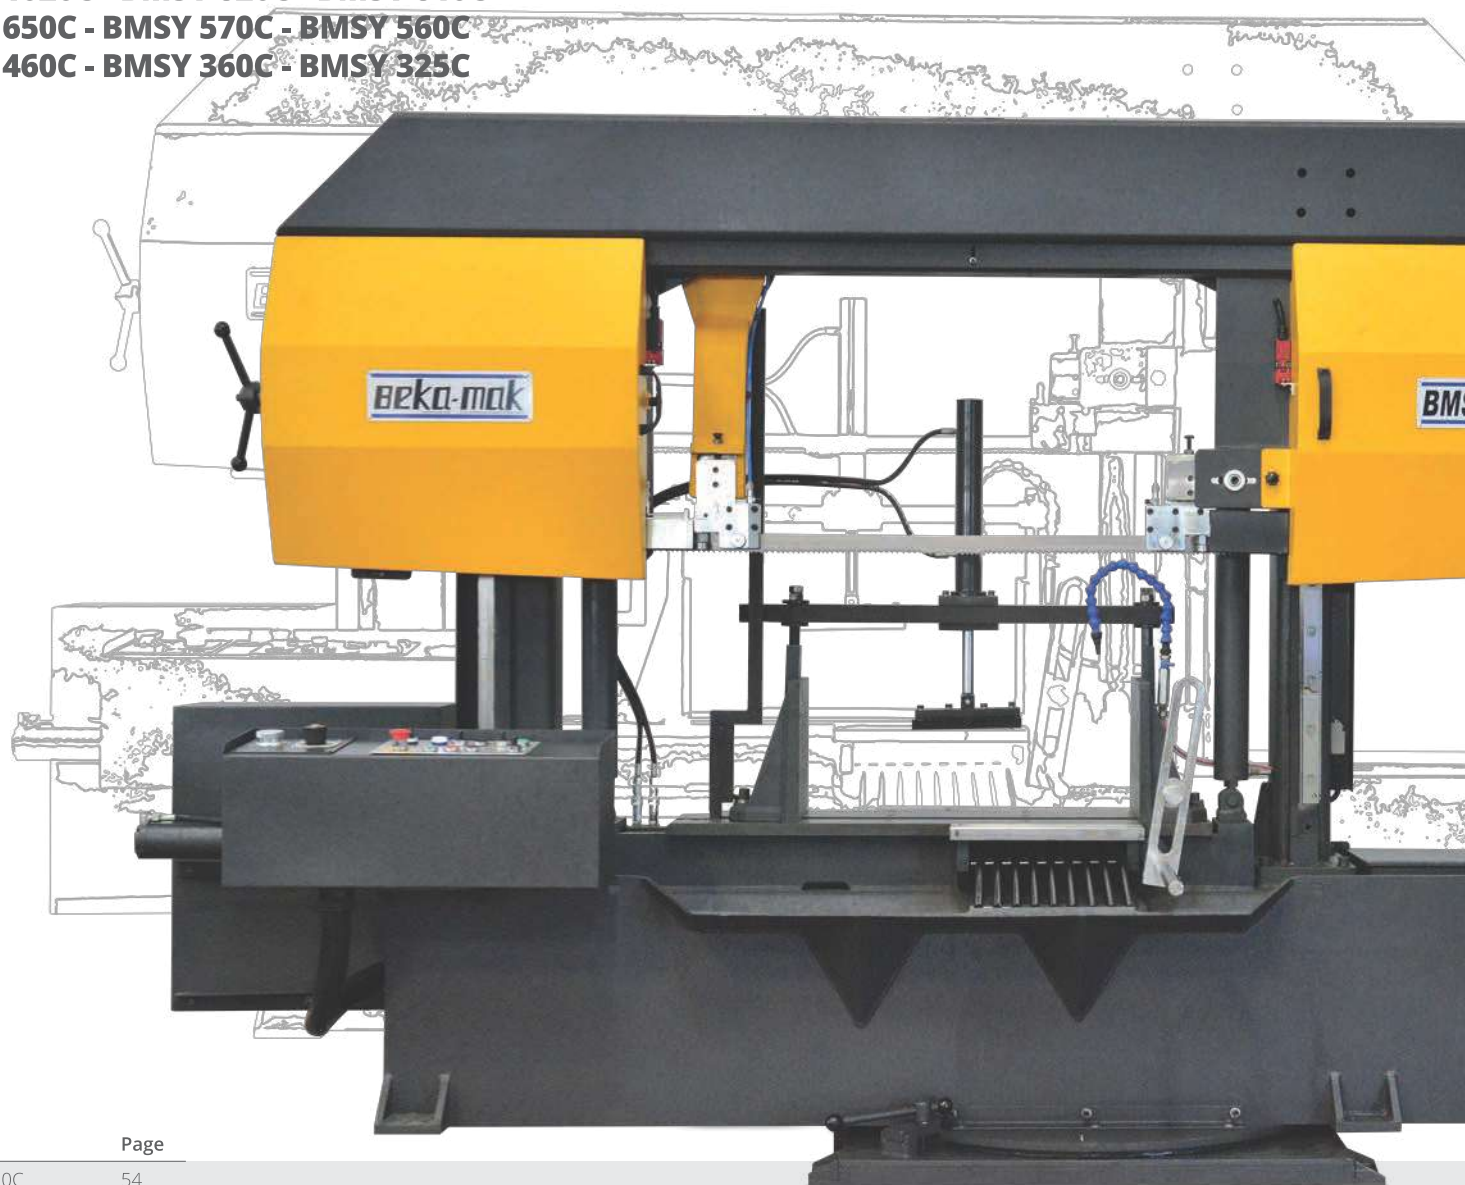

Type	Page
BMSY 1020C	54
BMSY 820C	56
BMSY 810C	58
BMSY 650C	60
BMSY 570C	61
BMSY 560C	61
BMSY 460C	62
BMSY 360C	64
BMSY 325C	65

BMSY 1020C

Semi Automatic Double Column Bandsaw Machine

Standards

Planetary Gearbox
Control Panel
Chip Brush
Linear Way
Sensitive Pressure
Hydraulic Blade Tension
Hydraulic Vice
Optical Quick Approaching
Inverter
SAP Coolant Pump
Security Switch
Blade 54

Optionals

Chip Conveyor
Laser Pointer
2° Inclined Bow
Microspray Coolant
3 Mt Motorized Roller Table
3 Mt Roller Table
Hydraulic Top Clamping




OPTIONALS



Technical Datas

				
Cutting Capacity	0°	1020	1020 x 1020	1020
Main Motor	7,5 kW			
Hydraulic Motor	2,2 kW			
Coolant Motor	0,12 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	9500 x 54 x 1,6 mm			
Working Height	535 mm			
Dimensions	Lenght 4500 mm	Width 1700 mm	Height 2750 mm	Weight 5860 kg



Chip Conveyor



Laser Pointer



2° Inclined Bow



Microspray Coolant



3 Mt Motorized
Roller Table



3 Mt Roller Table



Hydraulic Top
Clamping



BMSY 820C

Semi Automatic Double Column Bandsaw Machine

Standards

- Planetary Gearbox
- Hydraulic Vice
- Synchronization Moveable Arm/Vice
- Security Switch
- Sensitive Pressure
- Control Panel
- Optical Quick Approaching
- Inverter
- Chip Brush
- Linear Way
- Length Stop
- SAP Coolant Pump
- 1,2 mt Roller Table
- Height Adjustment Sensor
- Hydraumechanical Blade Tension
- Sensitive Pressure
- Hydraulic Blade Tension (BMSY 820 C)

Optionals

- High Vices
- Double Vice
- Hexagonal Vices
- Laser Pointer
- Chip Conveyor
- Hydraulic Top Clamping
- 3 Mt Motorized Roller Table
- 3 Mt Roller Table
- Microspray Coolant
- 2° Inclined Bow
- Turn Table



OPTIONALS

High Vices



Double Vice



Hexagonal Vices




Laser Pointer





Technical Datas

				
Cutting Capacity	0°	820	850 x 820	820
	45°	480	480 x 820	480
Main Motor	7,5 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200 x 54 x 1,6 mm			
Working Height	585 mm			
Dimensions	Lenght 3900 mm		Height 2350 mm	
	Width 1200 mm		Weight 3424 kg	



Chip Conveyor



Hydraulic Top Clamping



3 Mt Motorized Roller Table



3 Mt Roller Table



Microspray Coolant



2° Inclined Bow



Turn Table



BMSY 810C

Semi Automatic Double Column Bandsaw Machine

Standards

- Planetary Gearbox
- Hydraulic Vice
- Synchronization Moveable Arm/Vice
- Security Switch
- Sensitive Pressure
- Control Panel
- Optical Quick Approaching
- Inverter
- Chip Brush
- Linear Way
- Length Stop
- SAP Coolant Pump
- 1,2 mt Roller Table
- Height Adjustment Sensor
- Hydraumechanical Blade Tension
- Sensitive Pressure
- Hydraulic Blade Tension (BMSY 820 C)

Optionals

- High Vices
- Double Vice
- Hexagonal Vices
- Laser Pointer
- Chip Conveyor
- Hydraulic Top Clamping
- 3 Mt Motorized Roller Table
- 3 Mt Roller Table
- Microspray Coolant
- 2° Inclined Bow
- Turn Table
- Hydraulic Blade Tension
- Split Vice



OPTIONALS

High Vices



Double Vice



Hexagonal Vices



Laser Pointer



Chip Conveyor




Hydraulic Top Clamping





Technical Datas

				
Cutting Capacity	0°	810	850 x 810	810
	45°	480	480 x 810	480
Main Motor	4 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200x41x1,3 mm			
Working Height	585 mm			
Dimensions	Lenght 3900 mm		Height 2350 mm	
	Width 1200 mm		Weight 3080 kg	



3 Mt Motorized Roller Table



3 Mt Roller Table



Microspray Coolant



2° Inclined Bow



Turn Table



Hydraulic Blade Tension



Split Vice



BMSY 650C - BMSY 570C

BMSY 560C


Semi Automatic Double Column Bandsaw Machine

Standards

- Planetary Gearbox
- Linear Way
- Control Panel
- Length Stop
- SAP Coolant Pump
- 1,2 mt Roller Table
- Hydraulic Vice
- Hydraumechanical Blade Tension
- Inverter
- Sensitive Pressure
- Chip Brush
- Optical Quick Approaching

Optionals

- Double Vice
- Hexagonal Vices
- Hydraulic Blade Tension
- 3 Mt Motorized Roller Table
- Laser Pointer
- Chip Conveyor
- Hydraulic Top Clamping
- 3 Mt Roller Table
- Microspray Coolant
- Turn Table
- 2° Inclined Bow



OPTIONALS

Double Vice



Hexagonal Vices



Hydraulic Blade Tension



3 Mt Motorized Roller Table



Laser Pointer





Technical Datas

	BMSY 650C				BMSY 570C			
								
Cutting Capacity	0°	650	1000 x 600	600	0°	570	600 x 570	570
Main Motor	7,5 kW				7,5 kW			
Hydraulic Motor	4 kW				2,2 kW			
Coolant Motor	0,12 kW				0,2 kW			
Chip Conveyor Motor	0,25 kW				-			
Motorized Swarf Brush	0,18 kW				-			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	8400 x 54 x 1,6 mm				7400 x 54 x 1,6 mm			
Working Height	650 mm				700 mm			
Dimensions	Lenght 4750 mm Width 1970 mm		Height 2500 mm Weight 5300 kg		Lenght 3450 mm Width 1150 mm		Height 2300 mm Weight - kg	

Technical Datas

	BMSY 560C			
				
Cutting Capacity	0°	560	750 x 560	560
	45°	410	410 x 560	410
Main Motor	4 kW			
Hydraulic Motor	1,1 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	6000 x 41 x 1,3 mm			
Working Height	590 mm			
Dimensions	Lenght 3400 mm Width 1000 mm		Height 2050 mm Weight 2045 kg	

Chip Conveyor



Hydraulic Top Clamping



3 Mt Roller Table



Microspray Coolant



Turn Table



2° Inclined Bow



BMSY 460C

Semi Automatic Double Column Bandsaw Machine

Standards

- Planetary Gearbox
- Hydraulic Vice
- Control Panel
- Security Switch
- Inverter
- Linear Way
- Hydraumechanical Blade Tension
- Length Stop
- SAP Coolant Pump
- 1,2 mt Roller Table
- Chip Brush
- Sensitive Pressure
- Optical Quick Approaching

Optionals

- High Vices
- Double Vice
- Hexagonal Vices
- Hydraulic Top Clamping
- 3 Mt Motorized Roller Table
- Laser Pointer
- Chip Conveyor
- 3 Mt Roller Table
- Microspray Coolant
- Hydraulic Blade Tension
- 2° Inclined Bow
- Turn Table
- Split Vice



OPTIONALS

High Vices



Double Vice



Hexagonal Vices



Hydraulic Top Clamping



3 Mt Motorized Roller Table




Laser Pointer





Technical Datas

				
Cutting Capacity	0°	460	650 x 460	460
	45°	380	380 x 460	380
Main Motor	4 kW			
Hydraulic Motor	0,55 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	5200 x 41 x 1,3 mm			
Working Height	590 mm			
Dimensions	Lenght 3100 mm		Height 1800 mm	
	Width 1000 mm		Weight 1520 kg	



Chip Conveyor



3 Mt Roller Table



Microspray Coolant



Hydraulic Blade Tension



2° Inclined Bow



Turn Table



Split Vice



BMSY 360C - BMSY 325C


Semi Automatic Double Column Bandsaw Machine

Standards

- | | |
|--------------------|-----------------------------------|
| Planetary Gearbox | Hydraumechanical Blade Tension |
| Blade 34 | Control Panel |
| Chip Brush | Optical Quick Approaching |
| Hydraulic Vice | SAP Coolant Pump |
| Inverter | Synchronization Moveable Arm/Vice |
| Security Switch | Linear Way |
| Length Stop | 1,2 mt Roller Table |
| Sensitive Pressure | |

Optionals

- | | |
|-----------------------------|-------------------------|
| High Vices | Microspray Coolant |
| Double Vice | Hydraulic Blade Tension |
| Hexagonal Vices | 2° Inclined Bow |
| Hydraulic Top Clamping | Turn Table |
| 3 Mt Motorized Roller Table | Split Vice |
| Laser Pointer | |
| Chip Conveyor | |
| 3 Mt Roller Table | |



OPTIONALS

High Vices



Double Vice



Hexagonal Vices



Hydraulic Top Clamping




3 Mt Motorized Roller Table



Laser Pointer





Technical Datas

	BMSY 360C				BMSY 325C			
Cutting Capacity	0°	380	520 x 380	380	0°	325	450 x 325	325
	45°	300	300 x 380	300	45°	250	250 x 325	250
Main Motor	3 kW				2,2 kW			
Hydraulic Motor	0,55 kW				0,55 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	4800 x 34 x 1,1 mm				4160 x 34 x 1,1 mm			
Working Height	590 mm				580 mm			
Dimensions	Lenght 2850 mm		Height 1660 mm		Lenght 2150 mm		Height 1500 mm	
	Width 930 mm		Weight 1330 kg		Width 860 mm		Weight 1010 kg	



Chip Conveyor



3 Mt Roller Table



Microspray Coolant



Hydraulic Blade Tension



2° Inclined Bow



Turn Table




Split Vice





SEMI AUTOMATIC MITRE CUTTING BANDSAW MACHINES

BMSY 810 CGH - BMSY 540 CGH - BMSY 440 CGH
BMSY 360 CGH - BMSY 325 CGH
BMSY 320 GL - BMSY 320 G - BMS 320 G

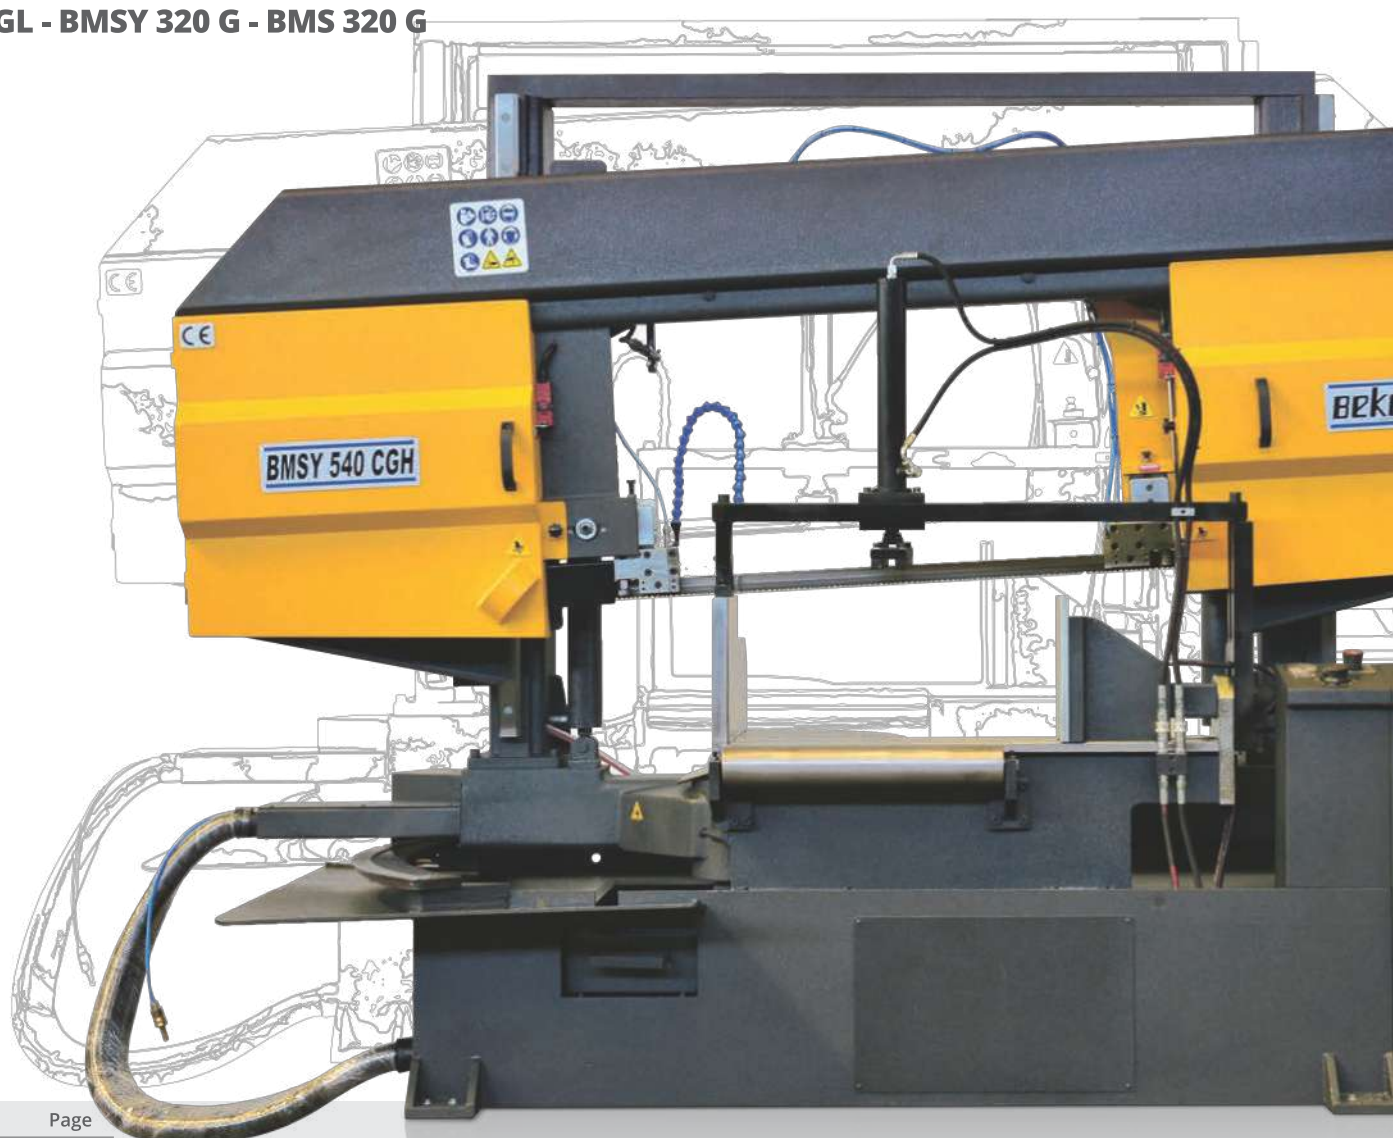

Type	Page
BMSY 810 CGH	78
BMSY 540 CGH	80
BMSY 440 CGH	82
BMSY 360 CGH	83
BMSY 325 CGH	84
BMSY 320 GL	85
BMSY 320 G	86
BMS 320 G	87

BMSY 810 CGH

Semi Automatic Mitre Cutting Bandsaw Machine

Standards

Planetary Gearbox
Digital Angle Display
Blade 41
Hydraulic Vice
Hydraulic Angle Fixing
Inverter
Hydraumechanical Blade Tension
Security Switch
Synchronization Moveable Arm/Vice
Linear Way
Sensitive Pressure
Control Panel
SAP Coolant Pump
3° Inclined Bow
Chip Brush

Optionals

Hydraulic Blade Tension
Hydraulic Top Clamping
Laser Pointer
Chip Conveyor
3 Mt Motorized Roller Table
3 Mt Roller Table
Microspray Coolant




OPTIONALS



Technical Datas

				
Cutting Capacity	0°	810	750 x 910	750
	30°	760	740 x 750	740
	45°	600	750 x 600	600
	60°	360	750 x 360	360
Main Motor	4 kW			
Hydraulic Motor	1,5 kW			
Coolant Motor	0,12 kW			
Chip Conveyor Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	8200 x 41 x 1,3 mm			
Working Height	725 mm			
Dimensions	Lenght 4020 mm	Width 1600 mm	Height 2450 mm	Weight 3970 kg



Microspray Coolant



Hydraulic Blade Tension



Hydraulic Top Clamping



Laser Pointer



Chip Conveyor



3 Mt Motorized Roller Table



3 Mt Roller Table



BMSY 540 CGH


Semi Automatic Mitre Cutting Bandsaw Machine

Standards

Planetary Gearbox
Digital Angle Display
Inverter
Linear Way
Sensitive Pressure
Hydraulic Angle Fixing
Control Panel
Blade 41
Hydraulic Vice
Synchronization Moveable Arm/Vice
Hydraumechanical Blade Tension
Security Switch
Chip Brush
3° Inclined Bow
Optical Quick Approaching

Optionals

Hydraulic Top Clamping
Hydraulic Blade Tension
Laser Pointer
3 Mt Motorized Roller Table
3 Mt Roller Table
Microspray Coolant

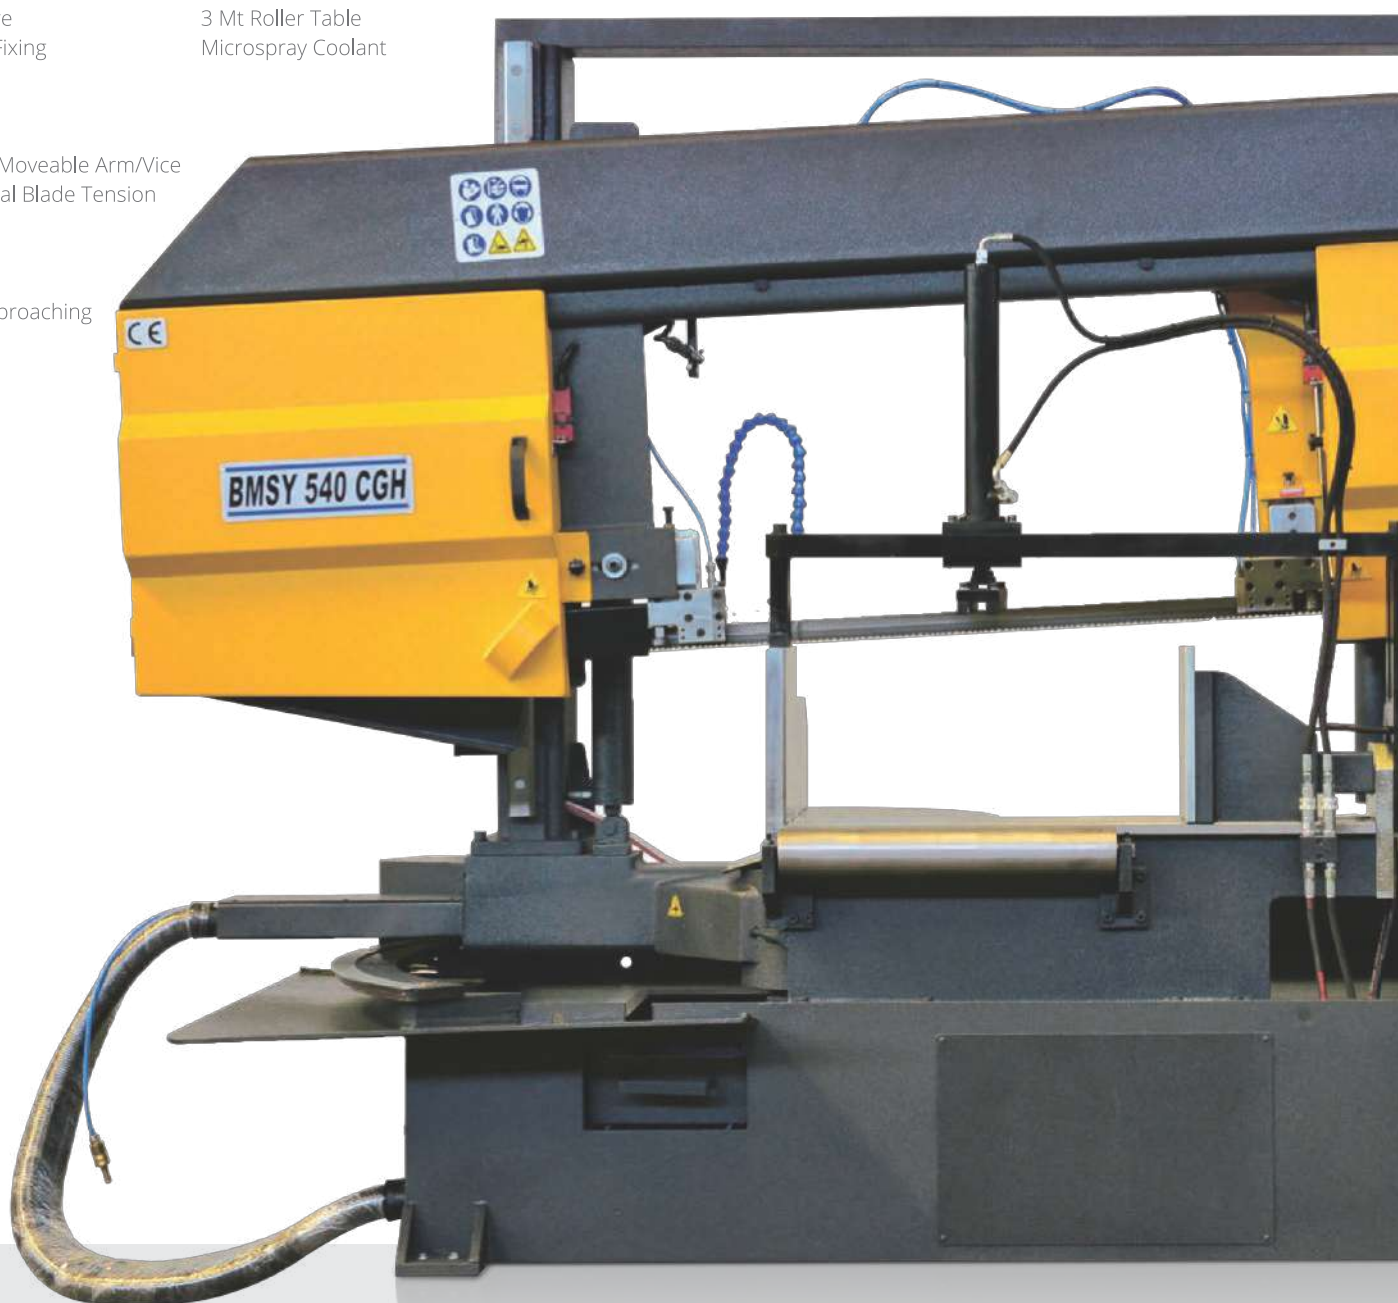


OPTIONALS



Technical Datas

				
Cutting Capacity	0°	540	750 x 540	540
	30°	540	600 x 540	540
	45°	510	450 x 540	450
	60°	270	250 x 540	250
Main Motor	4 kW			
Hydraulic Motor	1,1 kW			
Coolant Motor	0,12 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	6000 x 41 x 1,3 mm			
Working Height	695 mm			
Dimensions	Lenght 3000 mm	Width 1300 mm	Height 2150 mm	Weight 2445 kg



Hydraulic Top Clamping



Hydraulic Blade Tension



Laser Pointer



3 Mt Motorized Roller Table



3 Mt Roller Table



Microspray Coolant



BMSY 440 CGH - BMSY 360 CGH


Semi Automatic Mitre Cutting Bandsaw Machine

Standards

- Planetary Gearbox
- Linear Way
- Hydraumechanical Blade Tension
- Synchronization Moveable Arm/Vice
- Chip Brush
- Digital Angle Display
- Inverter
- Control Panel
- Sensitive Pressure
- Hydraulic Angle Fixing

Optionals

- Microspray Coolant
- Hydraulic Blade Tension
- Laser Pointer
- 3 Mt Motorized Roller Table
- 3 Mt Roller Table
- Chip Conveyor
- Hydraulic Top Clamping



OPTIONALS

Microspray Coolant



Hydraulic Blade Tension



Laser Pointer



3 Mt Motorized Roller Table



3 Mt Roller Table



Chip Conveyor




Hydraulic Top Clamping





Technical Datas

	BMSY 440 CGH				BMSY 360 CGH			
								
Cutting Capacity	0°	450	695 x 425	425	0°	360	700 x 360	360
	30°	450	560 x 425	425	30°	360	590 x 360	360
	45°	430	430x 425	425	45°	360	450 x 360	360
	60°	320	260 x 425	290	60°	325	280 x 360	290
Main Motor	4 kW				3 kW			
Hydraulic Motor	0,55 kW				0,55 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	5400 x 41 x 1,3 mm				5200 x 34 x 1,1 mm			
Working Height	690 mm				690 mm			
Dimensions	Lenght 2850 mm		Height 1800 mm		Lenght 2850 mm		Height 1820 mm	
	Width 1300 mm		Weight 1630 kg		Width 1300 mm		Weight 1460 kg	



BMSY 325 CGH - BMSY 320 GL


Semi Automatic Mitre Cutting Bandsaw Machine

Standards

- Linear Way
- Sensitive Pressure
- Blade 34
- SAP Coolant Pump
- Security Switch
- Hydraumechanical Blade Tension
- Chip Brush
- Hydraulic Vice
- Optical Quick Approaching
- Synchronization Moveable Arm/Vice
- 2° Inclined Bow
- Inverter
- Digital Angle Display
- Hydraulic Angle Fixing
- Control Panel
- Height Adjustment Swich
- Length Stop
- Digital Angle Display
- 1,2 Mt Roller Table

Optionals

- Microspray Coolant
- Hydraulic Top Clamping
- Hydraulic Blade Tension
- Chip Conveyor
- Laser Pointer
- 3 Mt Roller Table
- 3 Mt Motorized Roller Table
- Sensitive Pressure



OPTIONALS

Microspray Coolant



Hydraulic Top Clamping



Hydraulic Blade Tension



Chip Conveyor



Laser Pointer



3 Mt Roller Table




3 Mt Motorized Roller Table



Technical Datas

	BMSY 325 CGH				BMSY 320 GL			
								
Cutting Capacity	0°	325	400 x 320	320	0°	320	610 x 320	320
	30°	325	360 x 320	320	30°	260	280 x 200	225
	45°	305	270 x 320	270	45°	320	355 x 320	320
	60°	190	180 x 240	180	60°	320	510 x 320	320
	-	-	-	-	75°	320	580 x 320	320
Main Motor	2,2 kW				2,2 kW			
Hydraulic Motor	0,55 kW				0,37 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	4380 x 34 x 1,1 mm				4160 x 34 x 1,1 mm			
Working Height	640				740 mm			
Dimensions	Lenght 2100 mm		Height 1600 mm		Lenght 2100 mm		Height 1350 mm	
	Width 1300 mm		Weight 1185 kg		Width 1200 mm		Weight 1195 kg	



Hydraulic Top Clamping



Microspray Coolant



Hydraulic Blade Tension



Sensitive Pressure



3 Mt Roller Table



BMSY 320 G - BMS 320 G


Semi Automatic Mitre Cutting - Manual Mitre Cutting Bandsaw Machine

Standards

Security Switch
Digital Angle Display
Height Adjustment Switch
Control Panel
Length Stop
SAP Coolant Pump
Hydraulic Vice
Inverter
Blade 27
Planetary Gearbox
Hydraumechanical Blade Tension
1,2 Mt Roller Table
Chip Brush

Optionals

Hydraulic Top Clamping
Microspray Coolant
Hydraulic Blade Tension
Sensitive Pressure
3 Mt Roller Table




OPTIONALS



Technical Datas

	BMSY 320 G				BMS 320 G			
								
Cutting Capacity	0°	320	350 x 320	320	0°	320	350 x 320	320
	30°	160	150 x 150	150	30°	160	150 x 150	150
	45°	260	250 x 180	180	45°	260	250 x 180	180
	60°	300	300 x 200	250	60°	300	300 x 200	250
	75°	320	350 x 200	300	75°	320	350 x 200	300
Main Motor	1,5 kW				1,5 kW			
Hydraulic Motor	0,37 kW				-			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	3660 x 27 x 0,9 mm				36600 x 34 x 1,1 mm			
Working Height	740 mm				740 mm			
Dimensions	Lenght 1900 mm		Height 1350 mm		Lenght 1900 mm		Height 1350 mm	
	Width 1200 mm		Weight 1015 kg		Width 1200 mm		Weight 960 kg	



Hydraulic Top Clamping



Microspray Coolant



Hydraulic Blade Tension



Sensitive Pressure




3 Mt Roller Table





SEMI AUTOMATIC DOUBLE MITRE CUTTING PIVOT TYPE BANDSAW MACHINES

BMSY 440 DGH / BMSY 440 DGH NC
BMSY 360 DGH - BMSY 360 DGH ECO
BMSY 270 DGH - BMSY 270 DG - BMS 270 DG
BMSY 230 DGH - BMSY 230 DG - BMS 230 DG

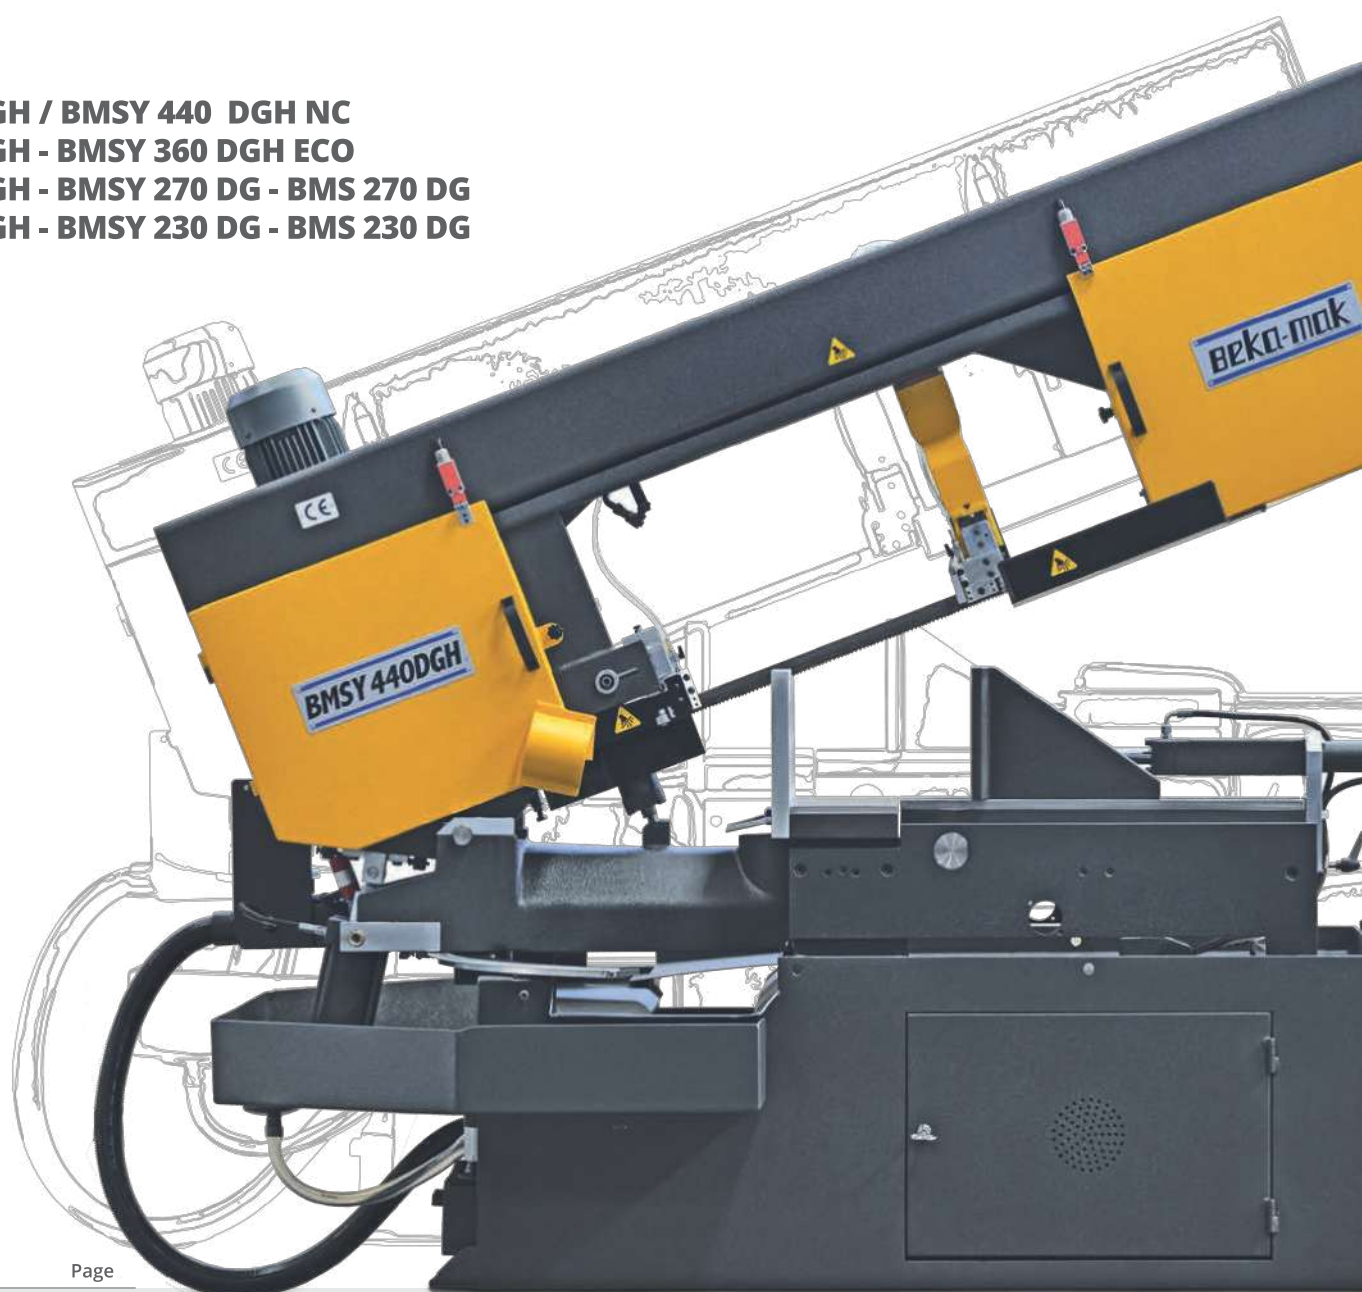

Type	Page
BMSY 440 DGH / DGH NC	90
BMSY 360 DGH	92
BMSY 360 DGH ECO	93
BMSY 270 DGH	94
BMSY 270 DG	94
BMS 270 DG	95
BMSY 230 DGH	96
BMSY 230 DG	96
BMS 230 DG	97

BMSY 440 DGH / DGH NC


Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine

Standards

Blade 34
Control Panel
Chip Brush
Inverter
Security Switch
Hydraumechanical Blade Tension
Linear Way Arm Guide
Hydraulic Vice
Vibration Cylinder
Height Adjustment Sensor
Planetary Gearbox
SAP Coolant Pump
Synchronization Movable Arm/Vice
Sensitive Pressure
NC Control Panel (NC Model)

Optionals


Hydraulic Blade Tension
Height Adjustment Sensor
3 Mt Motorized Roller Table
3 Mt Roller Table
Laser Pointer
Microspray Coolant



OPTIONALS

Technical Datas

	BMSY 440 DGH				BMSY 440 DGH NC			
								
Cutting Capacity	0°	-	440 x 610	440	0°	440	440 x 610	440
	30°	440	440 x 500	440	30°	440	440 x 500	440
	45°	410	440 x 410	410	45°	410	440 x 410	410
	60°	320	440 x 250	250	60°	320	440 x 250	250
	-30°	440	440 x 500	440	-30°	440	440 x 500	440
	-45°	410	440 x 410	410	-45°	410	440 x 410	410
	-60°	320	440 x 285	285	-60°	320	440 x 285	285
Main Motor	3 kW				3 kW			
Hydraulic Motor	0,55 kW				0,55 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	5000 x 34 x 1,1 mm				5200 x 34 x 1,1 mm			
Working Height	860 mm				860 mm			
Dimensions	Lenght 2750 mm		Height 1870 mm		Lenght 2800 mm		Height 1870 mm	
	Width 1210 mm		Weight 1195		Width 1210 mm		Weight 1640 kg	

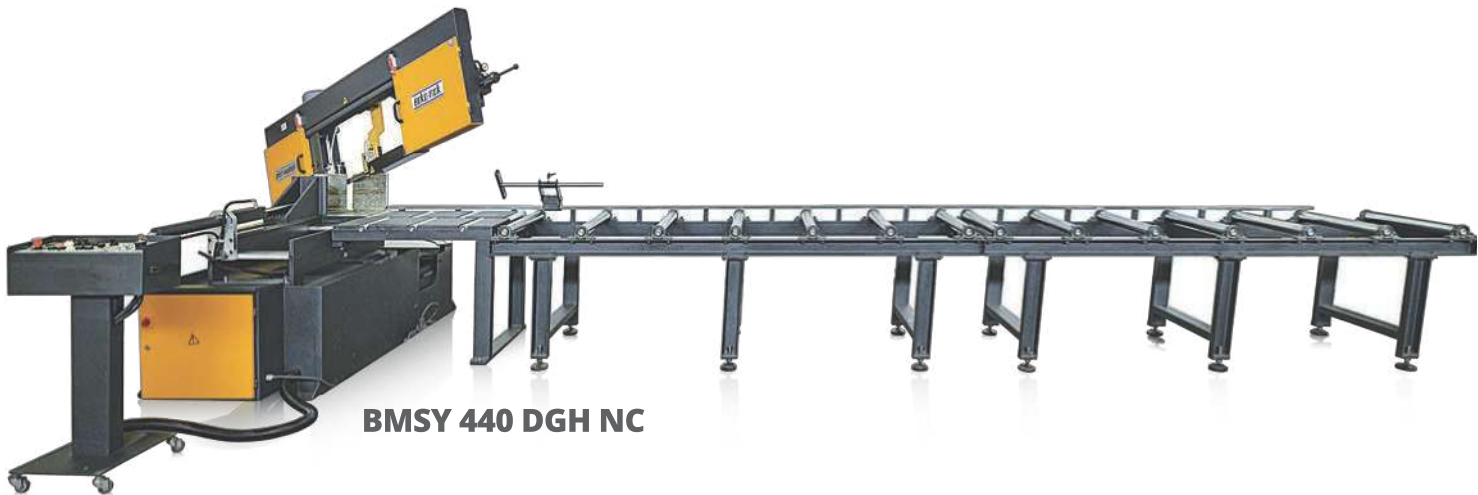

Hydraulic Blade
Tension



Height Adjustment
Sensor



3 Mt Motorized Roller
Table



3 Mt Roller Table



Laser Pointer



Microspray Coolant



BMSY 360 DGH - BMSY 360 DGH ECO


Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine

Standards

- Blade 34
- Sensitive Pressure
- Inverter
- Chip Brush
- Security Swich
- Hydraumechanical Blade Tension
- Linear Way Arm Guide
- Hydraulic Vice
- Vibration Cylinder
- Control Panel
- Planetary Gearbox
- SAP Coolant Pump
- Height Adjustment Swich
- Digital Angle Display
- Hareketli Kumanda

Optionals

- Hydraulic Blade Tension
- Height Adjustment Sensor
- 3 Mt Motorized Roller Table
- 3 Mt Roller Table
- Laser Pointer
- Microspray Coolant



OPTIONALS

Hydraulic Blade Tension



Height Adjustment Sensor



3 Mt Motorized Roller Table



3 mt Roller Table



Laser Pointer




Microspray Coolant





Technical Datas

	BMSY 360 DGH				BMSY 360 DGH ECO			
								
Cutting Capacity	0°	360	610 x 360	360	0°	360	510 x 360	360
	30°	360	610 x 360	360	30°	360	510 x 360	360
	45°	360	490 x 360	360	45°	360	390 x 360	360
	60°	340	300 x 360	300	60°	200	200 x 360	200
	-30°	360	610 x 360	360	-30°	360	510 x 360	360
	-45°	360	490 x 360	360	-45°	360	390 x 360	360
	-60°	360	360 x 360	360	-60°	260	260 x 360	260
Main Motor	3 kW				3 kW			
Hydraulic Motor	0,55 kW				0,37 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	5000 x 34 x 1,1 mm				4800 x 34 x 1,1 mm			
Working Height	860 mm				860 mm			
Dimensions	Lenght 2750 mm		Height 1870 mm		Lenght 2800 mm		Height 1870 mm	
	Width 1210 mm		Weight 1470		Width 1210 mm		Weight 1450 kg	



BMSY 270 DGH - BMSY 270 DG

Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine
DGH - Hydraulic Vice Standard

Standards

- Blade 27
- Height Adjustment Swich
- Planetary Gearbox
- SAP Coolant Pump
- Control Pedal
- Control Panel
- Length Stop
- Hydraumechanical Blade Tension
- Chip Brush
- Security Switch

Optionals


- 3 Mt Roller Table
- Inverter
- Microspray Coolant



BMSY 270 DGH



BMSY 270 DG



OPTIONALS

BMS 270 DG


Manual Double Mitre Cutting Pivot Type Bandsaw Machine

Standards

- Hydraumechanical Blade Tension
- Blade 27
- Inverter
- Chip Brush
- Security Swich
- Length Stop
- SAP Coolant Pump
- Control Panel

Optionals

- 3 Mt Roller Table
- Microspray Coolant



Technical Datas												
BMSY 270 DGH				BMSY 270 DG				BMS 270 DG				
												
0°	270	350x220	270	0°	270	350x220	270	0°	270	350x220	270	
45°	240	270x200	170	45°	240	270x200	170	45°	240	270x200	170	
60°	150	150x100	100	60°	150	150x100	100	60°	150	150x100	100	
-45°	210	270x210	180	-45°	210	270x210	180	-45°	210	270x210	180	
1,5 kW				1,5 kW				1,5 kW				
0,37 kW				0,37 kW				-				
0,12 kW				0,12 kW				0,12 kW				
20 - 100 m/min				20 - 100 m/min				20 - 100 m/min				
3160x27x0,9 mm				3160x27x0,9 mm				3160x27x0,9 mm				
910 mm				910 mm				910 mm				
Lenght 1730 mm		Height 1460 mm		Lenght 1730 mm		Height 1460 mm		Lenght 1730 mm		Height 1460 mm		
Width 770 mm		Weight 525 kg		Width 770 mm		Weight 476 kg		Width 770 mm		Weight 465 kg		

3 Mt Roller Table



Inverter



Microspray Coolant



BMSY 230 DGH - BMSY 230 DG



Semi Automatic Double Mitre Cutting Pivot Type Bandsaw Machine
DGH - Hydraulic Vice Standard

Standards

- Blade 27
- Inverter
- Chip Brush
- Hydraumechanical Blade Tension
- Security Switch
- Control Panel
- SAP Coolant Pump
- Planetary Gearbox
- Height Adjustment Switch
- Length Stop

Optionals

- 3 Mt Roller Table
- Inverter
- Microspray Coolant

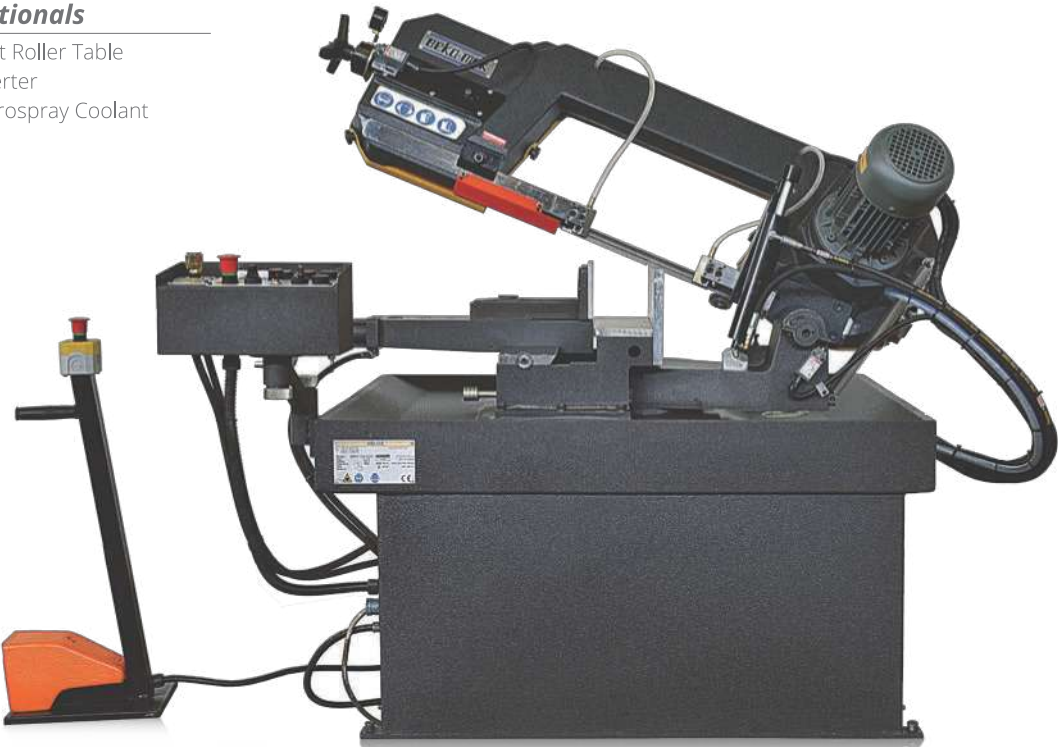

BMSY 230 DGH



BMSY 230 DG

OPTIONALS

BMS 230 DG


Manual Double Mitre Cutting
Pivot Type Bandsaw Machine

Standards

- Blade 27
- Height Adjustment Switch
- Hydraumechanical Blade Tension
- SAP Coolant Pump
- Chip Brush
- Length Stop
- Security Switch
- Control Panel
- Moving Vice

Optionals

- 3 Mt Roller Table
- Inverter
- Microspray Coolant



Technical Datas												
BMSY 230 DGH				BMSY 230 DG				BMS 230 DG				
												
0°	230	320 x 130	230	0°	230	320 x 130	230	0°	230	320 x 130	230	
-45°	180	230 x 160	150	-45°	180	230 x 100	150	-45°	180	230 x 100	150	
45°	210	230 x 160	180	45°	210	230 x 160	180	45°	120	230 x 160	180	
60°	120	120 x 100	100	60°	120	120 x 100	100	60°	120	120 x 100	100	
1,0 - 1,3 kW				1,0 - 1,3 kW				1,0 - 1,3 kW				
0,37 kW				0,37 kW				-				
0,12 kW				0,12 kW				0,12 kW				
35 - 70 m/min				35 - 70 m/min				35 - 70 m/min				
2730 x 27 x 0,9 mm				2730 x 27 x 0,9 mm				2730 x 27 x 0,9 mm				
760 mm				760 mm				760 mm				
Lenght 1350 mm		Height 1300 mm		Lenght 1350 mm		Height 1300 mm		Lenght 1350 mm		Height 1300 mm		
Width 700 mm		Weight 465 kg		Width 700 mm		Weight 430 kg		Width 700 mm		Weight 415 kg		

3 Mt Roller Table



Inverter



Microspray Coolant





SEMI AUTOMATIC PIVOT TYPE BANDSAW MACHINES

BMSY 440 - BMSY 350 M
BMSY 320 L - BMSY 320
BMSY 280



Type	Page
BMSY 440	106
BMSY 350 M	108
BMSY 320 L	109
BMSY 320	110
BMSY 280	111

BMSY 440

Semi Automatic Pivot Type Bandsaw Machine

Standards

- | | |
|----------------------|--------------------------------|
| Inverter | Planetary Gearbox |
| Blade 34 | Hydraulic Vice |
| Table | SAP Coolant Pump |
| Length Stop | Hydraumechanical Blade Tension |
| Security Switch | Control Panel |
| Vibration Cylinder | Height Adjustmen Swich |
| Linear Way Arm Guide | Chip Brush |

Optionals

- | |
|-----------------------------|
| Hydraulic Blade Tension |
| 3 Mt Roller Table |
| 3 Mt Motorized Roller Table |
| Hydraulic Top Clamping |
| Chip Conveyor |
| Microspray Coolant |
| Turn Table |




OPTIONALS



Technical Datas

				
Cutting Capacity	0°	440	610 x 440	440
	45°	410	410 x 440	410
Main Motor	3 kW			
Hydraulic Motor	0,55 kW			
Coolant Motor	0,12 kW			
Chip Conveyor	0,25 kW			
Bow Servo Motor	0,25 kW			
Cutting Speeds	20 - 100 m/min			
Blade Size	5200 x 34 x 1,1 mm			
Working Height	735 mm			
Dimensions	Lenght 2600 mm	Width 900 mm	Height 1710 mm	Weight 1310 kg



Hydraulic Blade Tension



3 Mt Roller Table



3 Mt Motorized Roller Table



Hydraulic Top Clamping



Chip Conveyor



Microspray Co-olant



Turn Table



BMSY 350 M - BMSY 320 L


Semi Automatic Pivot Type Bandsaw Machine

Standards

- Chip Brush
- Control Panel
- Hydraumechanical Blade Tension
- Inverter
- Height Adjustment Swich
- Hydraulic Vice
- Length Stop
- SAP Coolant Pump
- Security Swich

Optionals

- Microspray Coolant
- Hydraulic Blade Tension
- Sensitive Pressure
- Chip Conveyor
- 3 Mt Roller Table
- Turn Table
- Hydraulic Top Clamping



OPTIONALS

Microspray Coolant



Hydraulic Blade Tension



Sensitive Pressure



Chip Conveyor



3 Mt Roller Table




Turn Table



Hydraulic Top Clamping





Technical Datas

	BMSY 350 M				BMSY 320 L			
								
Cutting Capacity	0°	350	570 x 260	550	0°	330	610 x 310	330
	45°	350	460 x 180	350	45°	320	460 x 180	320
Main Motor	2,2 kW				2,2 kW			
Hydraulic Motor	0,37 kW				0,37 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	4160 x 34 x 1,1 mm				4160 x 34 x 1,1 mm			
Working Height	640 mm				640 mm			
Dimensions	Lenght 2300 mm		Height 1300 mm		Lenght 2100 mm		Height 1300 mm	
	Width 850 mm		Weight 795 kg		Width 850 mm		Weight 773 kg	



BMSY 320 - BMSY 280


Semi Automatic Pivot Type Bandsaw Machine

Standards

- Chip Brush
- Inverter
- Security Swich
- Control Panel
- Height Adjustment Swich
- Hydraumechanical Blade Tension
- Blade 27
- SAP Coolant Pump
- Length Stop
- Hydraulic Vice

Optionals

- Hydraulic Top Clamping
- Microspray Coolant
- Sensitive Pressure
- Chip Conveyor
- 3 Mt Roller Table
- Turn Table
- Hydraulic Blade Tension



OPTIONALS

Hydraulic Top Clamping

Microspray Coolant

Sensitive Pressure

Chip Conveyor


3 Mt Roller Table

Turn Table

Hydraulic Blade Tension

Technical Datas

	BMSY 320				BMSY 280			
								
Cutting Capacity	0°	320	440 x 220	320	0°	280	350 x 200	280
	45°	280	280 x 200	260	45°	240	240 x 180	210
Main Motor	1,5 kW				1,5 kW			
Hydraulic Motor	0,37 kW				0,37 kW			
Coolant Motor	0,12 kW				0,12 kW			
Cutting Speeds	20 - 100 m/min				20 - 100 m/min			
Blade Size	3660 x 27 x 0,9 mm				3400 x 27 x 0,9 mm			
Working Height	640 mm				640 mm			
Dimensions	Lenght 1900 mm		Height 1300 mm		Lenght 1800 mm		Height 1300 mm	
	Width 850 mm		Weight 670 kg		Width 850 mm		Weight 620 kg	





TUBES



WALL THICKNESS s(mm)	Outside Diameter D(mm) Toothng Z (tpi)									
	20	40	60	80	100	120	150	200	300	500
2	14	10/4	10/4	10/4	10/4	8/12	8/12	8/12	8/12	5/8
3	14	10/4	10/4	8/12	8/12	8/12	8/12	6/10	6/10	5/8
4	10/4	10/4	8/12	8/12	8/12	6/10	6/10	5/8	5/8	4/6S
5	10/4	10/4	8/12	8/12	6/10	6/10	5/8	4/6S	4/6S	4/6S
6	10/4	8/12	8/12	6/10	6/10	5/8	5/8	4/6S	4/6S	4/6S
8	10/4	8/12	8/12	6/10	5/8	5/8	4/6	4/6	4/6	4/6
10		8/12	6/10	5/8	4/6	4/6	4/6	4/6	4/6	4/5
12		8/12	6/10	4/6	4/6	4/6	4/6	4/6	4/6	4/5
15		8/12	6/10	4/6	4/6	4/6	4/6	4/5	4/5	4/5
20			4/6	4/6	4/6	4/6	4/6	4/5	4/5	3/4
30				4/6	4/6	4/5	4/5	4/5	4/5	2/3
50							4/5	3/4	2/3	2/3
80								3/4	2/3	2/3
>100									2/3	1,5/2

SOLID MATERIAL



Standart Toothng		Vario Toothng		Vario Toothng	
Cross Section	Toothng	Cross Section	Toothng	Cross Section	Toothng
bis 10 mm	14 tpi	bis 25 mm	10/14 tpi	50-120 mm	3/4 tpi
10-30 mm	10 tpi	15-40 mm	8/12 tpi	100-250 mm	2/3 tpi
30-50 mm	8 tpi	25-20 mm	6/10 tpi	150-400 mm	1.5/2 tpi
50-80 mm	6 tpi “	35-70 mm	5/8 tpi	350-600 mm	1.1/1.6 tpi
80-120 mm	4 tpi **	40-90 mm	5/6 tpi	>500 mm	0.75/1.25 tpi
120-200 mm	3 tpi **	50-120 mm	4/6 tpi***		
200-400 mm	2 tpi	80-180 mm	3/4 tpi***		
300-700 mm	1.25 tpi	130-135 mm	2/3 tpi		
>600 mm	0,75 tpi	150-450 mm	1.5/2 tpi		
		200-600 mm	1.1/1.6 tpi		
		>500 mm	0.75/1.25 tpi		

Hydraulic Top Clamping For
BMSY 1110 C



Hydraulic Top Clamping For
NC Machines



Slide Connection Roller Tables For BMSY 650 DG



Laser Line Pointer



Microspray



3MT MOTORIZED ROLLER TABLE FOR BMSY 440DGH



Multiple Segments



Multiple Segments



Hydraulic Top Clamping



Hydraulic Blade Tension



3MT MOTORIZED ROLLER TABLE FOR BMSY 820C



Chip Conveyor For
BMSY 1110 C



Chip Conveyor For
BMSY 650 DG



3 MT ROLLER TABLE FOR BMSY 810C



Second Vice For BMSY 1110 C




Chip Conveyor For
BMSO 360 CH







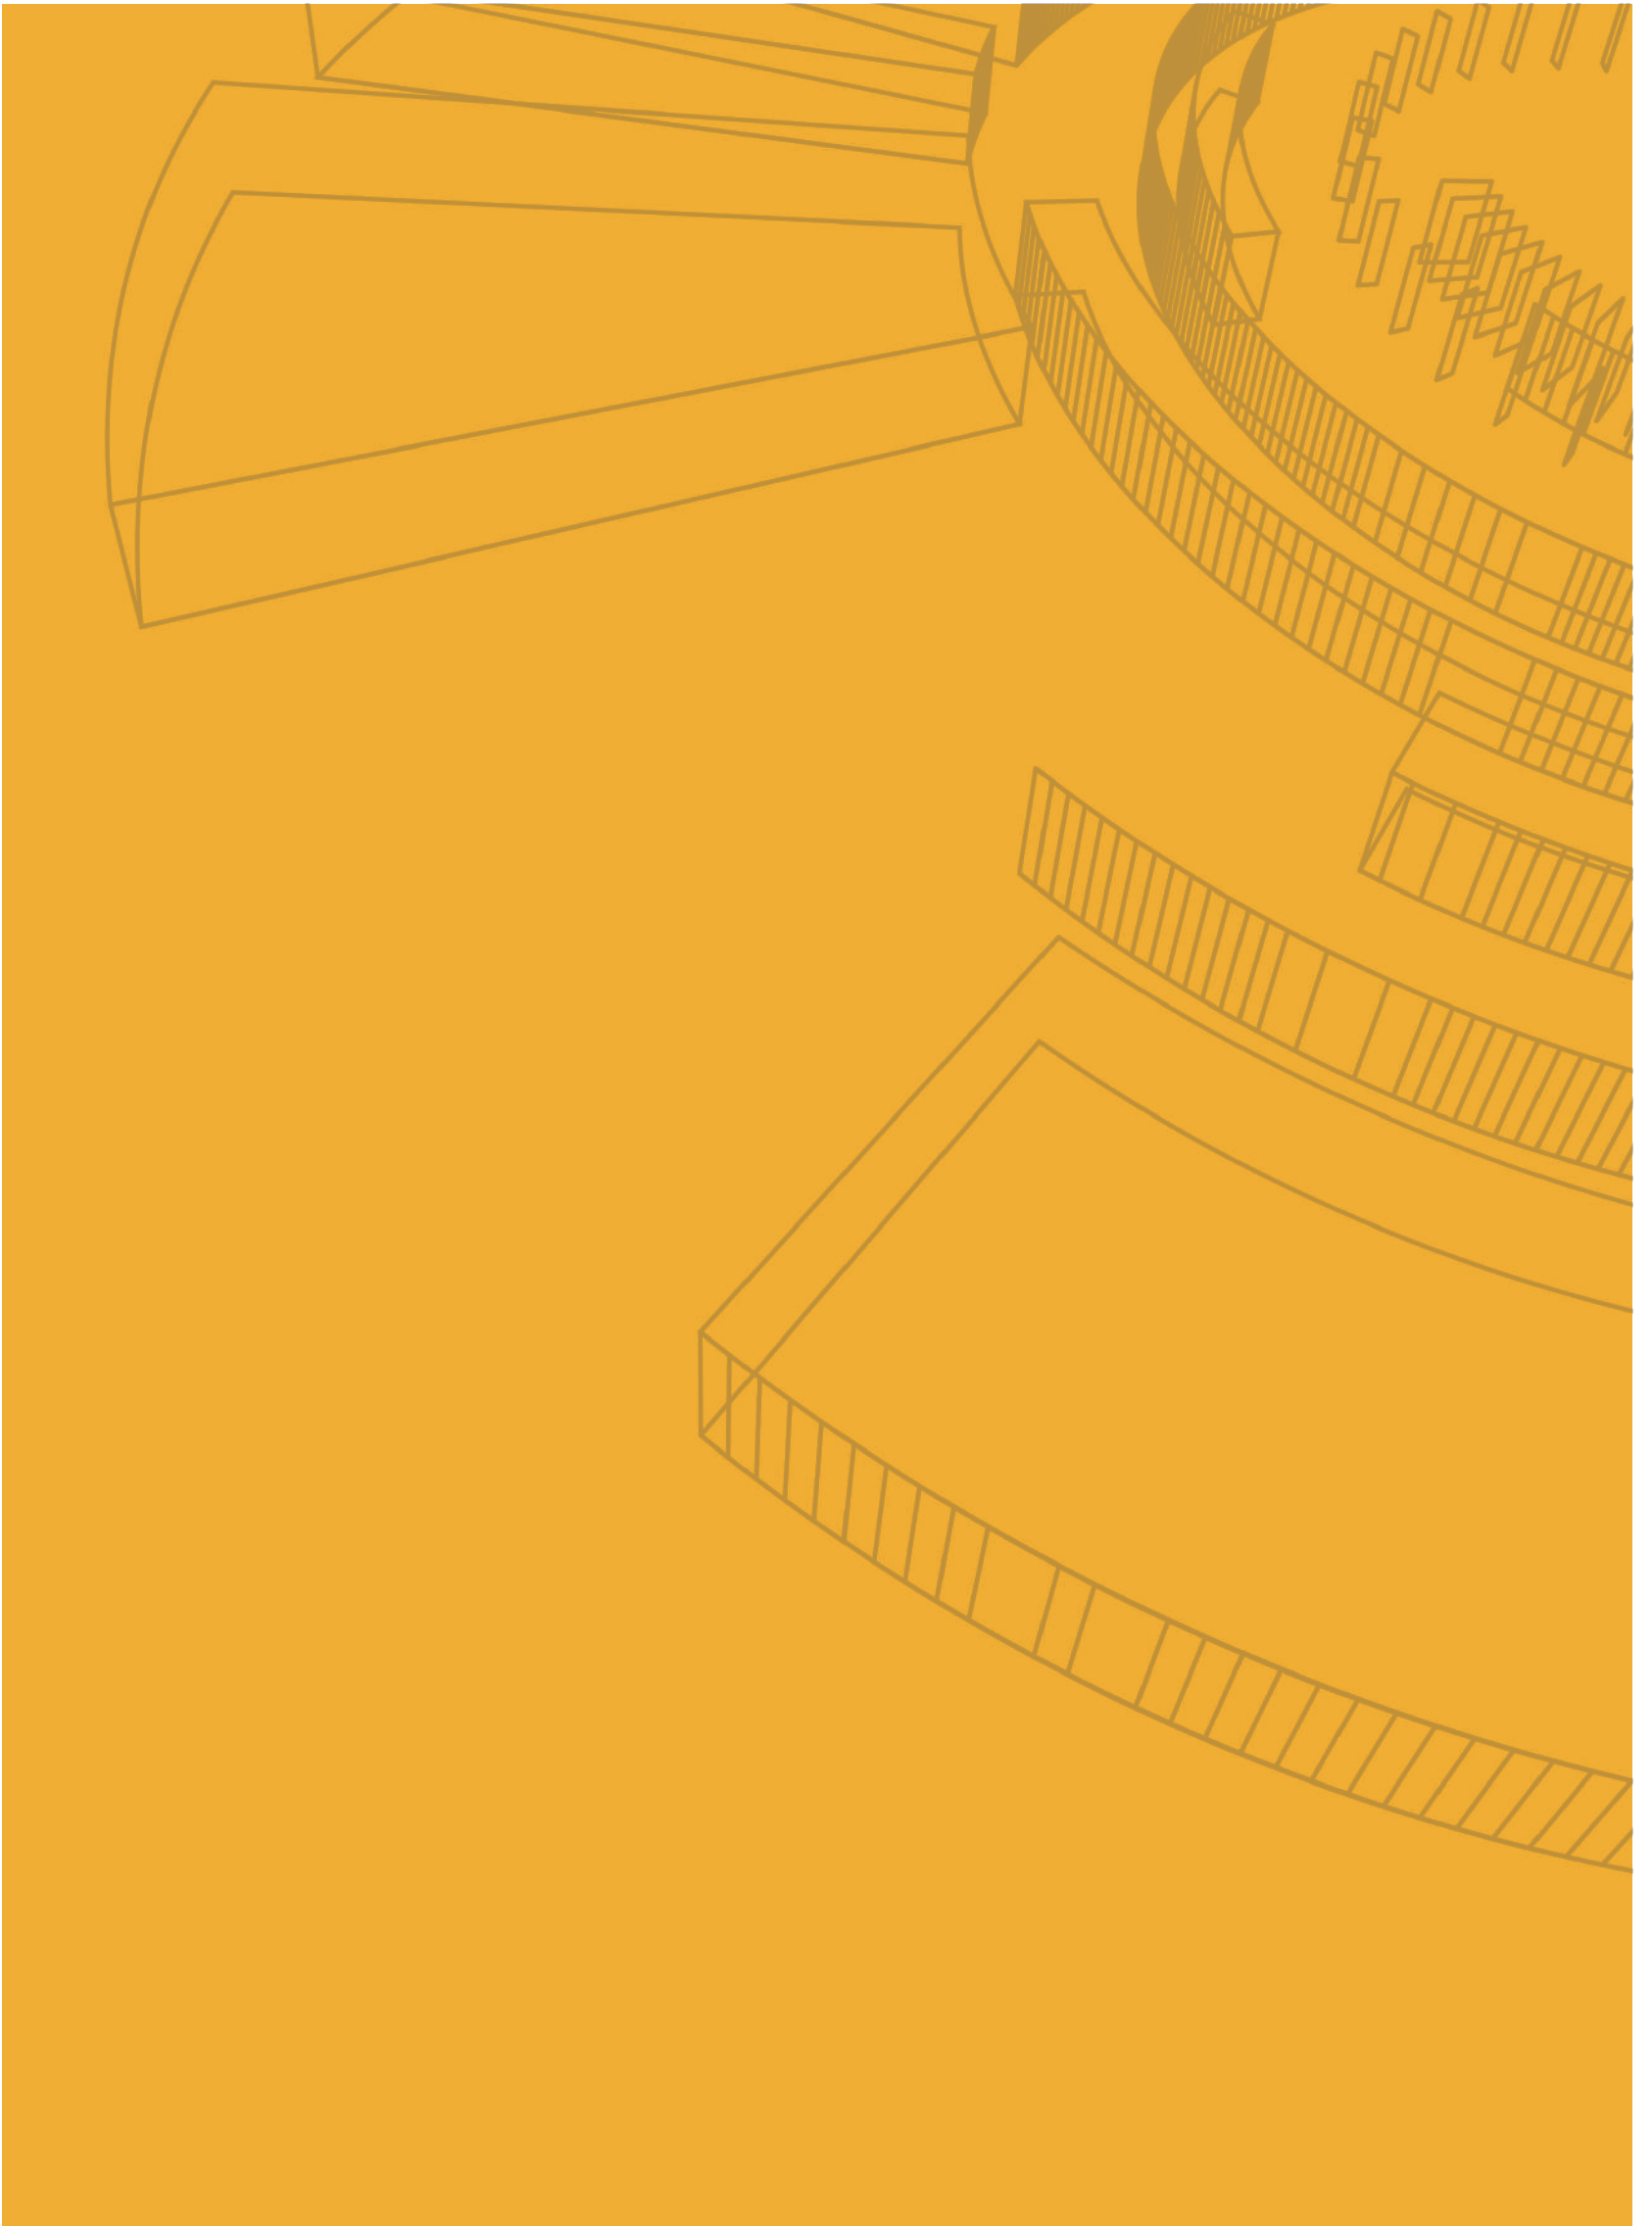



www.bekamak.com

ente

BEKA - MAK MAKİNE SANAYİ VE TİCARET A.Ş.
Başköy İzmir Yolu Cad. No: 698 16370 Nilüfer / BURSA
Tel : +90 (224) 449 03 61
Fax : +90 (224) 449 03 60
E-mail : info@bekamak.com



MEMBER OF



Türkiye Makine
İmalatçılar Birliği
www.mib.org.tr



European Committee for
Cooperation of the Machine Tool Industries
www.cecimo.be



YOUR BEKA - MAK PARTNER

